Product Name:
LS-J-D202-INDIRECT

Product Specification
Light source: SMD2835
LED Quantity: 24
Voltage/ Frequency: 120V AC/60Hz
Power: 9W
Lumens: 550lm
CCT: 3000K/5000K
PF: ≥0.9
CRI: >90
Lifetime: 50000 hours
Beam Angle: 134°
Dimmable: Yes

Features
2 inch down light.
Indoor use only.
Suitable for damp location.
This device is not intended for use with emergency exits.

Product Code	COLOR	COLOR TEMPERATURE	VOLTAGE	WATTAGE	LUMEN	Luminous Efficiency	Beam Angle
LS-J-D202-3K	WHITE	3000K	120V	9W	550lm	61lm/w	134°
LS-J-D202-5K	WHITE	5000K	120V	9W	550lm	61lm/w	134°

	BOX SIZE	Unit Weight	Units per case	Package dimensions	Shipping Weight
LSJ-D202-3K	82X47X84MM	0.1KG	48PCS/Carton	585X180X190MM	4KG
LSJ-D202-5K	82X47X84MM	0.1KG	48PCS/Carton	585X180X190MM	4KG

Warning

Switch off the power before replacing down light.
All goods will be guaranteed for 3 years in normal use from date of original purchase.
Improper use (wrong voltage, wrong power supply, wrong dimmer etc) will not be guaranteed.
For quality problem, we will send free replacements for bulbs or other spare parts as requested together with next order.
For damaged goods, you need to inform us within three days after receiving the goods. We will send you replacement spare parts (bulbs) or help to claim from the forwarder.

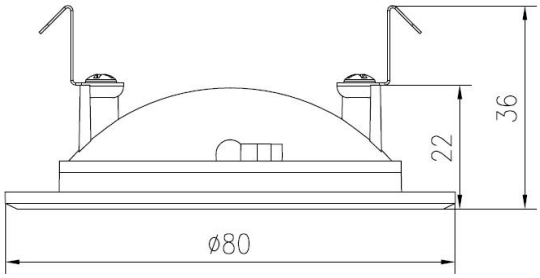

Size: 80X22MM / 3.2X0.9Inch

Easy to Install:

INCANDESCENT HOUSINGS
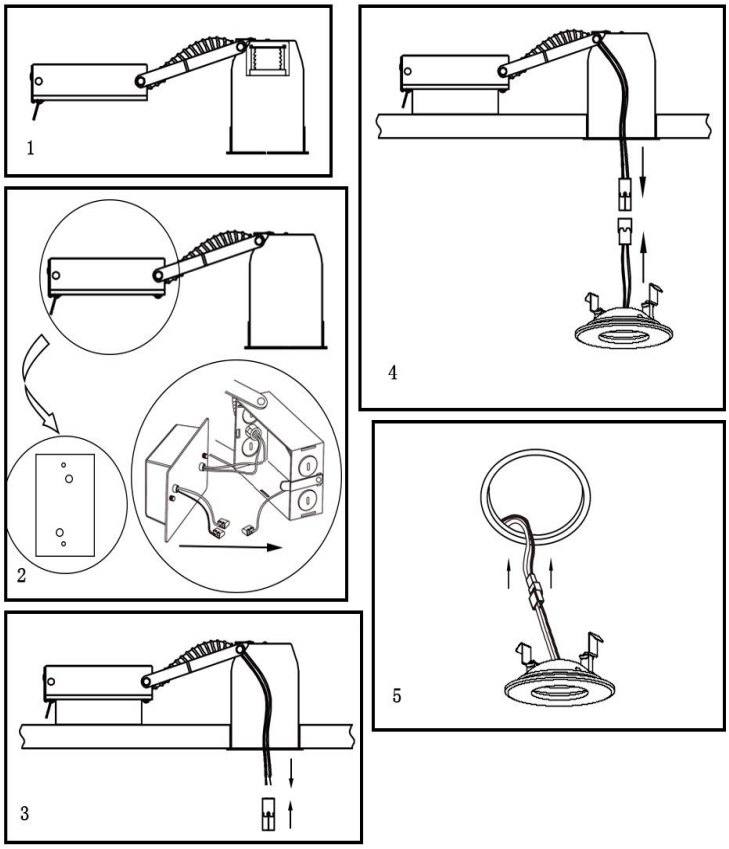
• SHUT OFF POWER BEFORE INSTALLATION.
• TAKE OFF THE EXISTING E26 SOCKET AND ALL THE EXTRA WIRES. **(FIG. 1)**
• DRILL 4 HOLES ON THE CAP OF J-BOX THEN FIX THE DRIVER ON THE J-BOX. **(FIG. 2)**
• PLUG THE FEMALE CONNECTOR OF THE RETROFIT TRIM ONTO THE MALE CONNECTOR OF THE SOCKET ADAPTER ASSEMBLY. **(FIG. 4)**
• TUCK ALL WIRES INTO THE CAN AND CAREFULLY PUSH THE RETROFIT TRIM INTO CAN. **(FIG. 5)**