



Installation Instruction LED Linear Light


CAUTIONS

- All electrical connection must be in accordance with local National Electrical Code(N.E.C) standards.
- To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply. Turn off the power when you perform any maintenance.
- If the product is damaged, do not use it.
- This luminaire is rated for 100-277Vac 50/60Hz only.
- For indoor use only. Suitable for Dry locations.
- Operating in ambient temperature -20°C to 40°C / -4°F to 104°F.

CLEANING




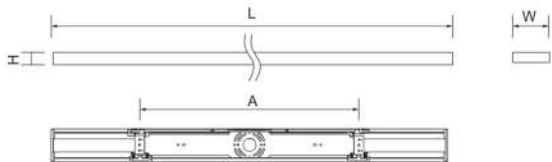


- Clean the outside of the fixture with a soft, dry cloth or slightly dampened clean cloth. Never use a cleaner with chemicals, solvents, or harsh abrasives to clean the product.
- Do not spray cleaner directly onto any part of the fixture or LEDs as this may permanently damage the light or its functions

PRODUCT SPECIFICATIONS:



L	W	H	A
303	100/150	39	205
603	100/150	39	205
1213	100/150	39	570
2413	100/150	39	1070
600	300	26/33	345
1200	300	26/33	565
600	600	26/33	345
1200	600	26/33	565


Unit: mm

<p>Remark: Lamp appearance subject to the model No.</p>  <p>X 1PCS</p>	<p>Remark: Bracket appearance subject to the model No.</p>  <p>X 1PCS</p>	 <p>X 2PCS</p>
 <p>X 5PCS</p>	 <p>X 4PCS</p>	 <p>X 4PCS</p>

BEFORE INSTALLATION:

- Carefully remove the light fixture, mounting package, from the box and check that all parts are included. Do not attempt to assemble the product if any part is missing or damaged.
- Always Turn off the power supply before installation.
- Should be installed by qualified electricians.
- A loose wire increases the risk of fire; tighten all connections securely.

Warning: Failure to disconnect the power supply prior to installation may result in serious injury or death.

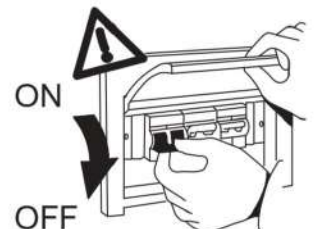

INSTALLATION PROCEDURE:

1. Cut off the mains power supply, drill screw holes in the ceiling at the designated bracket positions, and insert the expansion tube into the holes.

2. Use the screws in the accessory pack to fasten the mounting bracket to the J-box, then secure the expansion bolt into the pre-installed expansion tube.

3. Remove the lamp from its packaging, detach the mounting bracket. Use a screwdriver to loosen the screws on the back cover of the panel lamp and remove the cover. Then, pull out the internal power cord. (A) is CCT & Power switch; The location of the power cord outlet varies among different lamp models. Please refer to the actual model for accurate information, as shown in (1).

4. Align the larger mounting hole (1) at both ends of the lamp with the pivot shaft (2) of the mounting bracket, then push the lamp to make the lamp bracket engage with the screws at both ends of the mounting bracket.

5. Connect the power cable and the cable of the lamp with the wire nuts in the accessory package; then lock the safety rope buckle of the lamp to the mounting bracket.

6. Put the power cord into the J-box, align the lamp slot with the mounting bracket's clip, push the lamp upward along the arrow direction until reaching the ceiling, then press on the lamp body until the mounting bracket's clip fits into the lamp's slot. Finally push the lamp until it is fully fixed.

7. Turn on the power to ensure the lamp works normally.

8. Lamp removal : Cut off the power supply, push the long end of the lamp parallelly (1), and pull down (2) to remove it (if you cannot push the lamp, please operate from the other end).