





 Please read **all the instructions** before attempting installation

- WARNING - RISK OF FIRE OR ELECTRIC SHOCK. INSTALLATION OF THIS RETROFIT KIT REQUIRES A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE LUMINAIRE'S ELECTRICAL SYSTEM AND THE HAZARD INVOLVED. IF NOT QUALIFIED, DO NOT ATTEMPT INSTALLATION. CONTACT A QUALIFIED ELECTRICIAN.
- DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRING OR ELECTRICAL COMPONENTS DURING KIT INSTALLATION.
- AVERTISSEMENT - RISQUE D'INCENDIE OU DE CHOC ÉLECTRIQUE. L'INSTALLATION DE CE

 Product Dimensions of Driver Module and Reflector Kits

NO	Driver Module	Reflector Kit	Size (in)	Illustration	Dimensions	Cutouts
1	LSCD-4M-30W-5CCT	LSCD-4RR	4"		Ø6.69" * H5.73"	Ø4.72" (120mm)
2		LSCD-6RR	6"		Ø8.58 " * H5.94"	Ø7.01 " (178mm)
3		LSCD-8RR	8"		Ø10.47" * H6.69"	Ø7.87" (200mm)
4		LSCD-10RR	10"		Ø11.81" * H7.09"	Ø8.98 " (228mm)
5	LSCD-4M-30W-5CCT	LSCD-6RR	6"		Ø8.58" * H6.1"	Ø7.01 " (178mm)
6		LSCD-8RR	8"		Ø10.47" * H6.89"	Ø7.87 (200mm)
7		LSCD-10RR	10"		Ø11.81 " * H7.28"	Ø8.98 (228mm)

 Hanging Mount

Driver Modules			Reflector Kits		
Illustration	Model Number	Dimensions	Illustration	Model Number	Dimensions
	LSCD-4M-30W-5CCT	Ø4.31" X 3.0"		LSCD-4RR	Ø6.69" * H3.70"
	LSCD-6M-50W-5CCT	Ø5.51" X 3.2"		LSCD-6RR	Ø8.58" * H3.92"
				LSCD-8RR	Ø10.47" * H4.70"
				LSCD-10RR	Ø11.81" * H5.1"






 Tools Required (not included)

Changes or modifications to this unit not approved by the party responsible for compliance could void the user's authority to operate the equipment.



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

Hanging Mount

Driver Modules			Reflector Kits		
Illustration	Model Number	Dimensions	Illustration	Model Number	Dimensions
	LSCD-4M-30W-5CCT	Ø4.31"X3.0"		LSCD-4RR	L5.91"*W5.91"*H3.18"
	LSCD-6M-50W-5CCT	Ø5.51" X 3.2"		LSCD-6RR	L7.80"*W7.80"*H3.18"
				LSCD-8RR	L9.45"*W9.45"*H3.18"

Optional Accessories

	Mounting Plate	Compatible with 4, 6, 8, 10 inch round reflectors
	Emergency Driver	8W, 90 mins

Electrical Connection Wiring:

1. Connect BLACK (line) driver lead to voltage supply Line position (HOT).
2. Connect driver WHITE lead to the NEUTRAL supply position.
3. Connect the GREEN ground lead to the supply ground lead.

0-10V Dimming:

4. Connect VIOLET lead to supply POSITIVE dimming lead.
5. Connect Pink lead to the supply NEGATIVE dimming lead.

NOT Using 0-10V Dimming:

6. Ensure VIOLET and Pink 0-10V dimming leads are properly capped.

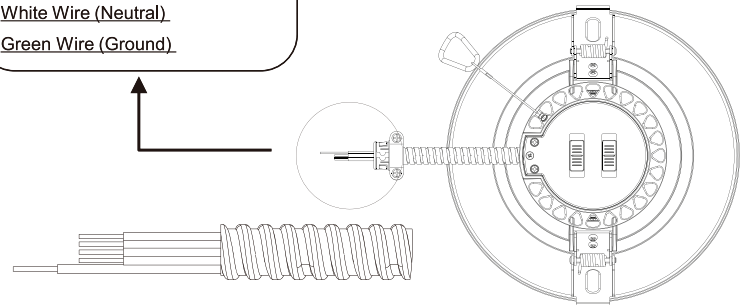
Pink Wire (Negative dimming lead)

Violet Wire (Positive dimming lead)

Black Wire (Hot)

White Wire (Neutral)

Green Wire (Ground)



Tools List



Gloves



Safety goggles




Ladder



Wire Cutter



Wire Stripper



Wire Nuts


Packing List

For Engine			For Reflector Kit		
Number	Description	Quantity	Number	Description	Quantity
1	LED Driver Module	1	1	Reflector Kit	1
2	Installation Manual	1	2	Installation Manual	1
			3	Ceiling Cutout Template	1

Pre-Installation


First: select the Driver Module settings

Number	Driver Module	Input Voltage	Dimmable	3-WATTselect [W]	5-CCTselect [K]	Beam Angle	Type IC
1	LCDLA1/DMS1830	AC120-277V 50/60Hz	1-10V+Triac	27K 30K 35K 40K 50K	18W 24W 30W	24°-60°	YES
2			1-10V		30W 40W 50W	36°-65°	
3	LCDLA1/DMS3050						

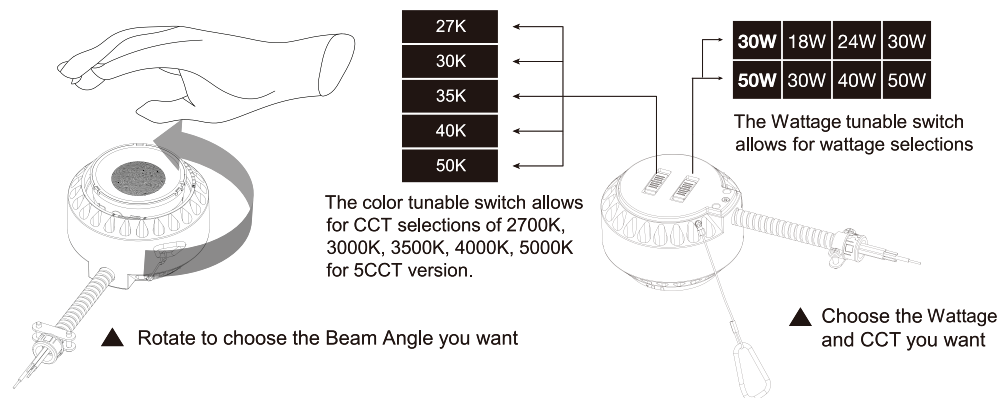

Pre-Installation (continued)

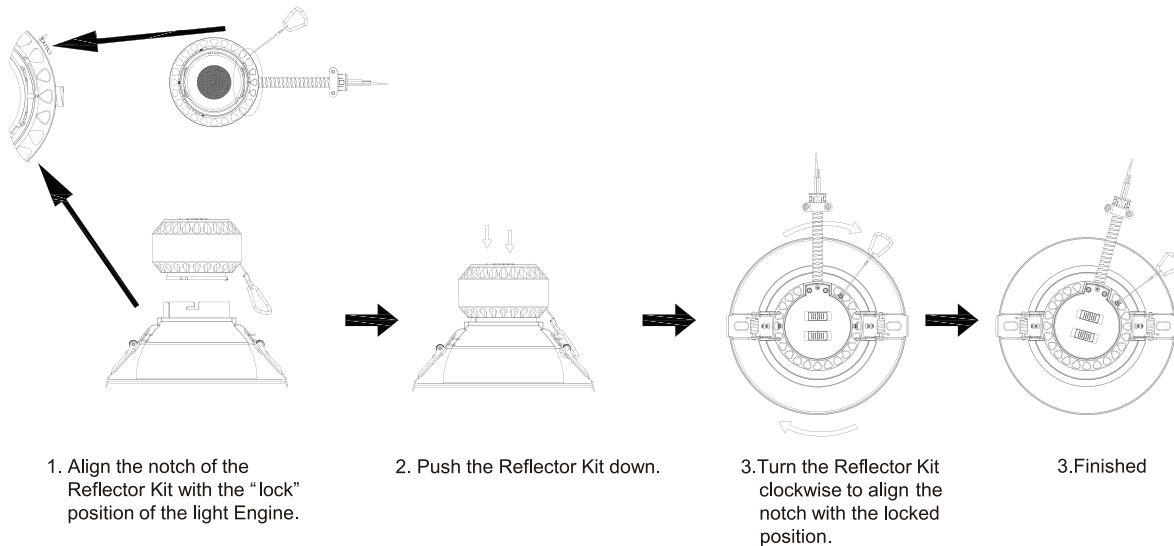
Second: select the Reflector Kit and assemble with Driver Module.



Retrofit Installation (A)


WARNING: Make sure the POWER is TURNED OFF where you are installing the product.

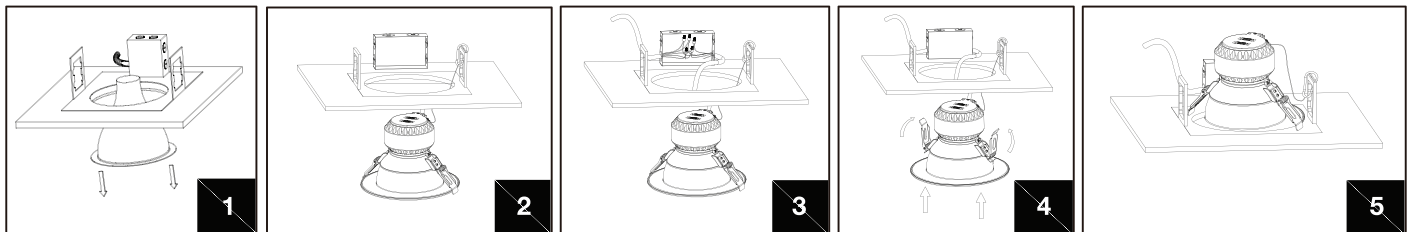1. Remove existing lamp and reflector. If existing trim or can are present, remove from the ceiling or move it out of the way. Make sure to retain existing rough-in kit components. (Figure 1)
2. Measure the ceiling opening and ensure the edge of the downlight retrofit will cover the entire hole and sit firmly in the ceiling. (Figure 1)
3. Attach the carabiner safety lanyard to the existing fixture housing. (Figure 2)
4. Remove the junction box faceplate. Disconnect wiring to existing ballast. Remove appropriate knock out on junction box.
5. Connect incoming AC mains power to fixture input leads. Insert the downlight conduit into the J-box and wire to the power source (black to hot, white to neutral, violet to 0-10V dimming positive, gray to 0-10V dimming negative). Reattach the J-box cover when done. (The grounding of the overall system shall be done in accordance with NEC and local codes). (Figure 3)
6. Bend the spring clips upward so they are in an upright and insert downlight into hole in the ceiling / housing. (Figure 4)
7. Once downlight is inside the ceiling and housing, release the spring clips and push the fixture up into the ceiling until securely fixed and flush with the ceiling (rotating the downlight may be necessary to properly engage the spring clips and ensure a secure fit). (Figure 5)
8. Restore power at the source. The installation is complete.



New Construction Installation (B)

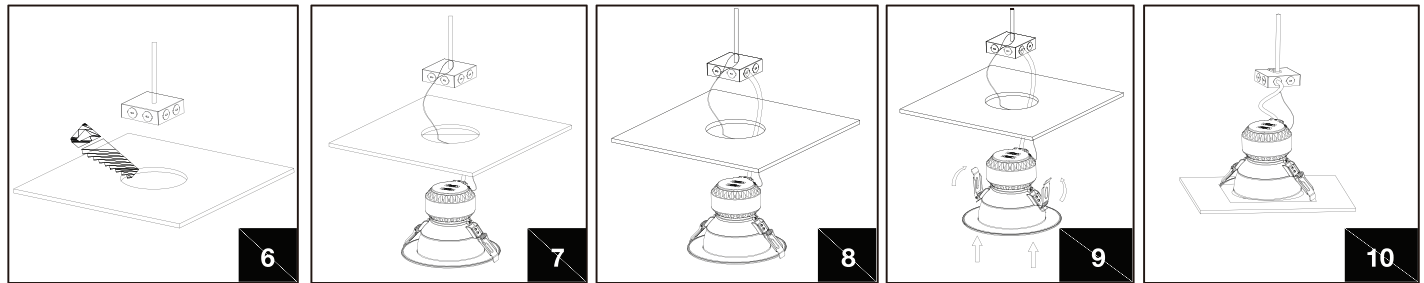1. If using a new construction plate, install it in the ceiling first.
2. If a new hole is needed, cut hole according to downlight cut-out dimension or "Ceiling Cut-out Template" per model number. (Figure 6)
3. Attach the carabiner safety lanyard to secure place inside the ceiling. (Figure 7)
4. Remove the junction box faceplate. Disconnect wiring to existing ballast. Remove appropriate knock out on junction box.
5. Connect incoming AC mains power to fixture input leads. Insert the downlight conduit into the J-box and wire to the power source (black to hot, white to neutral, violet to 0-10V dimming positive, gray to 0-10V dimming negative). Reattach the J-box cover when done. (The grounding of the overall system shall be done in accordance with NEC and local codes). (Figure 8)
6. Bend the spring clips upward so they are in an upright and insert downlight into hole in the ceiling / housing. (Figure 9)
7. Once downlight is inside the ceiling and housing, release the spring clips and push the fixture up into the ceiling until securely fixed and flush with the ceiling (rotating the downlight may be necessary to properly engage the spring clips and ensure a secure fit). (Figure 10)
8. Restore power at the source. The installation is complete.



WARNING - RISK OF FIRE OR ELECTRIC SHOCK. INSTALL THIS KIT ONLY IN THE LUMINAIRE THAT HAS THE CONSTRUCTION FEATURES AND DIMENSIONS SHOWN IN THE PHOTOGRAPHS AND/OR DRAWINGS AND WHERE THE INPUT RATING OF THE RETROFIT KIT DOES NOT EXCEED THE INPUT RATING OF THE LUMINAIRE.

WARNING - TO PREVENT WIRING DAMAGE OR ABRASION, DO NOT EXPOSE WIRING TO EDGES OF SHEET METAL OR OTHER SHARP OBJECTS.

THE RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION. PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE APPLICABLE AND APPROPRIATE ELECTRICAL CODES. THE INSTALLATION GUIDE DOES NOT SUPERSEDE LOCAL OR NATIONAL REGULATIONS FOR ELECTRICAL INSTALLATIONS.