



COMMERCIAL DOWNLIGHT

4", 6", 8" & 10" CANLESS LED RECESSED

Commercial-grade high lumen (1800-4450lm) downlight includes two tunable switches; selectable Lumens allows the end user to determine the wattage input and selectable 5CCT allows changing the color temperature appearance. With two tension steel spring clips, the LED commercial-grade downlight can be installed without any frame-in or housing.

FEATURES

- Wattage tuning
M110: 18W/24W/30W; M140: 30W/40W/50W
- Selectable 5CCT from
2700K/3000K/3500K/4000K/5000K @90+CRI
- Can-less installation (No housing is required)
- Optional Emergency back-up
- Field adjustable 24°-65° beam angle
- 120-277V, Triac and 0-10V dimming
- Available in Black, Silver or White finish
- 5 years warranty
- cETLus rated for Wet Locations




LED MODULE OPTION:
M110 - 30W
M140 - 50W

LSCD-4RR-30W-5CCT-SWH

LSCD-8SR-50W-5CCT-SWH

4", 6", 8" & 10"
Round & Square Reflector

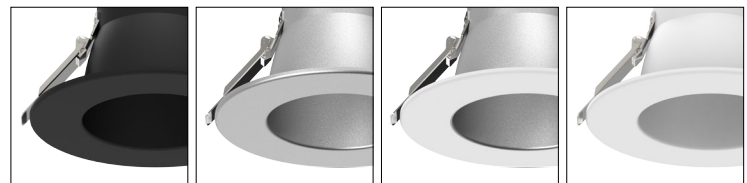

BBL Black/Black **SSL** Silver/Silver **SWH** Silver/White **WWH** White/White




EMERGENCY
add on option



TWIST-ON
for easy installation



TWIST LENS
Easy adjustable beam
angle output



QUICK CONNECTOR
Quick insert

CCT SWITCH
Selectable 5CCT
output
TUNABLE SWITCH
3 wattage selectable
power output

ORDERING INFO

LSCD-4	RR	30W	5CCT	SWH
LSCD-4 4"	RR Round	30W 18W/24W/30W	5CCT 27K/30K/35K/40K/50K	BBL Black/Black
LSCD-6 6"	SR Square*	50W 30W/40W/50W ¹		SSL Silver/Silver
LSCD-8 8"				SWH Silver/White
LSCD-10 10"				WWH White/White

* Square reflector only available in 4", 6" & 8"

¹ 50W is not compatible with 4"