



LS-2-IC-AT

2" LED Dedicated Double Wall ICAT New Construction Housing


Description 2" LED dedicated double wall IC housing is designed for new construction in residential and commercial applications and suitable for use in ceiling where the housing can be direct contact with insulation. Air-tight construction reduces energy costs by reducing the amount of air leakage through the ceiling.

FEATURES



- Galvanized steel plaster frame with J-Box and captive hanger bars.
- LED Driver is mounted directly on housing.
- Junction Box - Listed for through branch circuit wiring. Contains three 1-1/8", five 7/8" knockouts and four Romex pryouts with strain relief.
- Ceiling Thickness - Housing adjusts from 5/8"-1 3/8" to accommodate various ceiling thickness.
- 120V (Triac dimming) or 120/277V (0-10V dimming)
- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air-Tight construction



PRODUCT IMAGES & DIMENSIONS

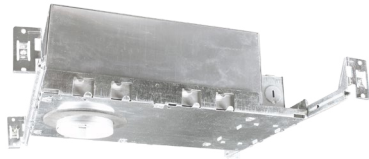

LS-2-IC-AT
2" LED Dedicated Double Wall ICAT
New Construction Housing

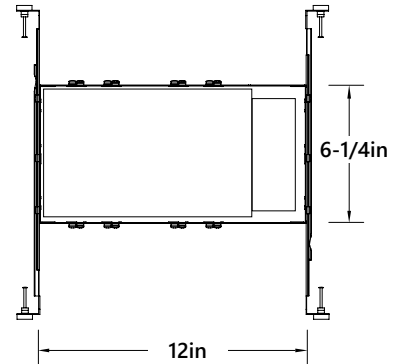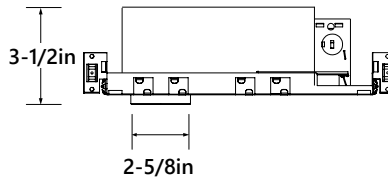

SPECIFICATIONS

| Catalog Number | Size | Type | Dimming | Certified |
|----------------|------|---|---------|-----------|
| LS-2-IC-AT | 2" | LED Dedicated Double Wall ICAT New Construction Housing | Triac | cULus |

Compatible Trims

- | | | | |
|-------------------|-----------------------|---------------------|------------------------------|
| LS-L-2-200 | 2" Round Smooth Trim | LS-L-2-203 | 2" Round Baffle Trim |
| LS-L-2-240 | 2" Square Smooth Trim | LS-L-2-243 | 2" Square Baffle Trim |
| LS-L-2-207 | 2" Round Gimbal Trim | LS-L-2-207-B | 2" Round Gimbal Trim, Black |
| LS-L-2-247 | 2" Square Gimbal Trim | LS-L-2-247-B | 2" Square Gimbal Trim, Black |