



LS-2-TL-5CCT

2" Trimless Selectable 5CCT Module Changeable Mini LED Downlight

Description 2" Trimless 5CCT selectable Regress LED module is IC rated aluminum die-cast with two tension spring clips. Used in conjunction with compatible driver box and 1" interchangeable trims.

FEATURES

- No housing required - IC Air-Tight rated
- Easy installation for remodel or new construction applications
- Quick disconnect allows for extended lengths
- Delivering 1000lm / 15W
- Selectable 2700K, 3000K, 3500K, 4000K or 5000K @ 90+CRI
- 100%-10% Triac or ELV dimming
- 5-year limited warranty
- JA8 and ENERGY STAR certified
- cETLus Listed for Wet Locations

Construction: Die-cast aluminum LED module includes 6" quick connect wire to the driver box for ease of installation. LED module is threaded to fit the trim and transfer heat

Installation: No housing is required, two tensions spring clips secure luminaire to ceiling. Accommodates ceiling thickness up to 3/4". Can be used in new construction applications with universal new construction frame-in (**LS-UNV-H234**).

Clearance: IC rated LED modules can be installed with direct contact with insulation (not spray foam insulation), no minimum clearance is required.

Optics: Luminaires include a flood optics installed. Replacement optics (spot or narrow flood) can be ordered separately and installed in the field without any tools.

PERFORMANCE


Input Voltage:	120V
Lumens / Wattage:	1000lm / 15W
Color Temperature:	Selectable: 2700K, 3000K, 3500K, 4000K or 5000K
Color Rendering Index:	90+CRI
Lifetime:	50,000 hours
Rating:	IC Air-Tight
Listing:	Energy Star, ETL, JA8



PRODUCT IMAGES & DIMENSIONS



LS-2-TL-5CCT
2" Trimless LED Module

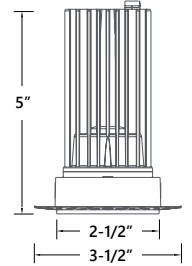


MUD RING OPTIONS



LS-2-MD-R
2" Round Mud-Ring, White

+


LS-2-TL-5CCT
2" Selectable 5CCT Trimless LED Module

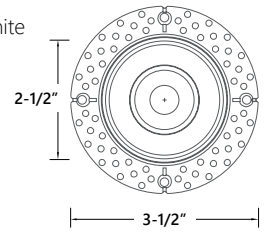

LS-2-MD-SQ
2" Square Mud-Ring, White

+

LS-2-TL-5CCT
2" Trimless Selectable 5CCT LED Module

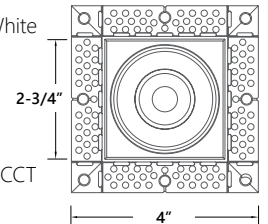

OPTIONAL FRAME-IN



LS-UNV-H234

Universal New Construction Frame-in

ORDERING CHART

2" Trimless 5CCT Selectable LED MODULE			2" TRIM OPTION		OPTIONAL ACCESSORIES
PART NUMBER	LUMEN/WATTAGE	SELECTABLE 5CCT	PART NUMBER	DESCRIPTION	PART NUMBER
LS-2-TL-5CCT	1000lm/15W	27K/30K/35K/40K/50K	LS-2-MD-R	2" Round Mud Ring, White finish	LS-UNV-H234 Universal New Construction Frame-in
			LS-2-MD-SQ	2" Square RMud Ring, White finish	

Example: **LS-2-TL-5CCT** 2" Trimless 5CCT 1000lm/15W LED Module; **LS-2-MD-R** 1" Round Mud Ring, White finish




LS-2-TL-5CCT


2" Trimless Selectable 5CCT Module Changeable Mini LED Downlight

PRODUCT PHOTOMETRIC TEST REPORT


LS-2-5CCT-2700K

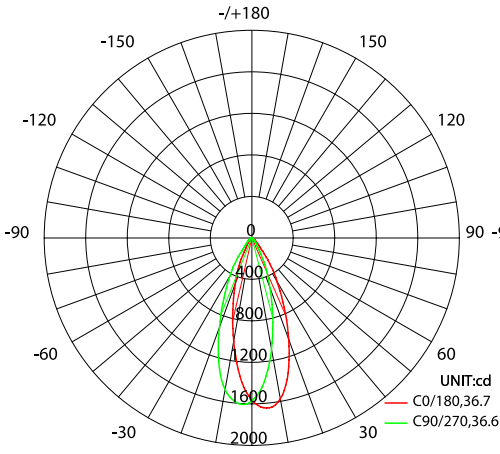


LS-2-5CCT-3000K

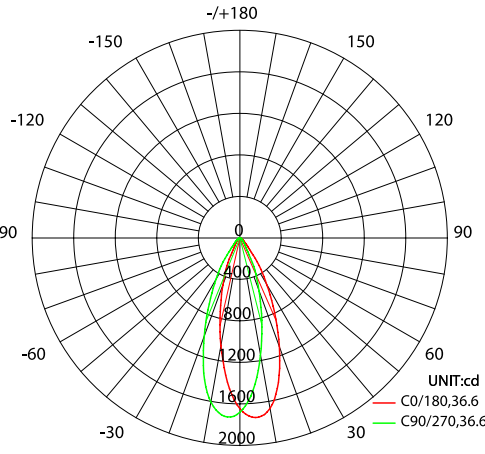

LS-2-5CCT-3500K

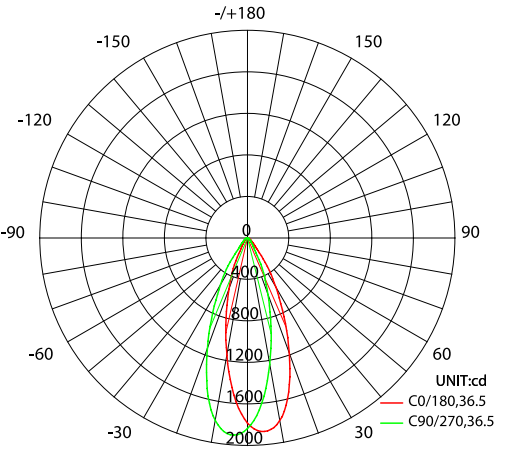

LS-2-5CCT-4000K

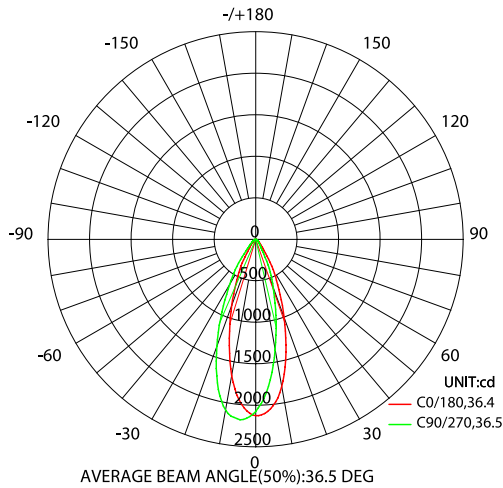

LS-2-5CCT-5000K

