

2" LED RECESSED DOWN LIGHT

LSL-200 Smooth




LSL-203 Baffle




PERFORMANCE DATA

Input Voltage	120V
Input Power	9W
Frequency	50 / 60Hz
CRI	90
T Ambient	-30°C ~ 40°C (-22°F ~ 104°F)
CCT	3000 K
Lumens	640 lm
(all values at 25°C without a dimming control in circuit)	

LSL-240 Square Smooth

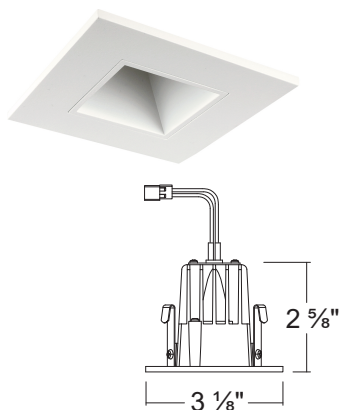

LSL-243 Square Baffle

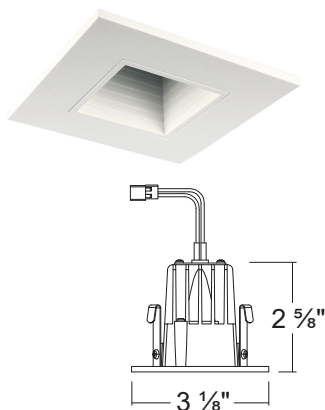


PERFORMANCE DATA

Input Voltage	120V
Input Power	9W
Frequency	50 / 60Hz
CRI	90
T Ambient	-30°C ~ 40°C (-22°F ~ 104°F)
CCT	3000 K
Lumens	630 lm
(all values at 25°C without a dimming control in circuit)	

LSL-207 Adj. Gimbal



LSL-247 Adj. Square Gimbal

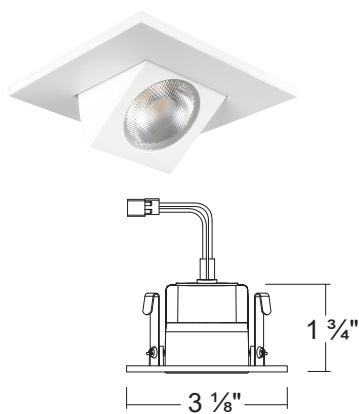

PERFORMANCE DATA

LSL-2-247 - 9W	
Input Voltage	120V
Input Power	LSL-207 9W / LSL247 -9W
Frequency	50 / 60Hz
CRI	90
T Ambient	-30°C ~ 40°C (-22°F ~ 104°F)
CCT	3000 K
Lumens	LSL-207 - 680 / LSL247-670
(all values at 25°C without a dimming control in circuit)	