



# LS-3NFR-ICAT

3" 2hrs. Fire Rated LED Dedicated IC Air-Tight Double Wall New Construction Housing

**Description** 3" LED dedicated IC Air-Tight housing is UL fire rated and can be protected for 2 hours with a double wall fixture incorporates a non-combustible fiber insulation to prevent flames, toxic gases, and ignition gases from passing through. Suitable for Condominiums, Apartment Buildings, Multi-Family, Commercial and Residential applications. Air-Tight construction reduces energy costs by reducing the amount of air leakages through the ceiling.

## FEATURES

**Plaster Frame:** Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box

**Junction Box:** Compact galvanized steel junction box with 24in<sup>3</sup> internal volume. Contains on 1-1/8", one 1/2", three 7/8" knockouts and four Romex® pry outs with strain relief.

**Bar Hanger:** Swivel-headed bar hangers with pre-installed Real nail easily installs in regular lumber, engineered lumber. Bar Hangers are adjustable from 13-5/8" to 25" and can be repositioned 90° on plaster frame.

## LISTING



cULus listed for Damp Location (Wet with specified trims)

Certified under ASTM-E283 for Air-Tight construction



## Compatible Trims:

LSRE-3RA5CTT; LSRE-3RB5CTT; LSRE-3RS5CTT; LSRE-3SQB5CTT; LSRE-3SQS5CTT

## PRODUCT IMAGES & DIMENSIONS



**LS-3NFR-ICAT**  
3" Fire Rated New Construction Housing

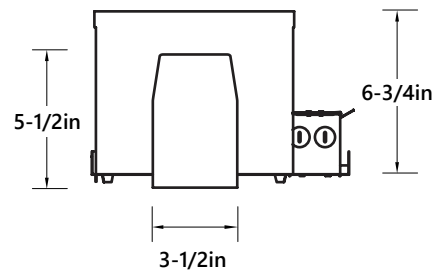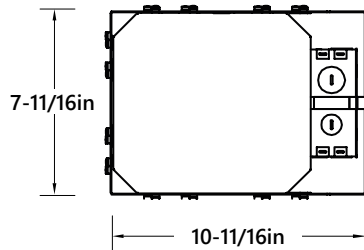

## SPECIFICATIONS

Catalog Number	Size	Description	Dimming	Certificated
LS-3NFR-ICAT	3"	Fire Rated LED Dedicated IC Air-Tight Double Wall New Construction Housing	Triac Dimming	cULus