




LS-4FR-S-IC-AT

4" 2-Hours Fire Rated Shallow New Construction Double Wall Dedicated LED Socket ICAT Housing



Description 4" Shallow New construction recessed housing fire-rated enclosure. New specification grade fire-rated new construction housing. The double wall fixture incorporates a non-combustible fiber insulation to prevent passage of flames, toxic gases, ignitable gasses into ceiling plenums. cULus listed housing with two-hour fire rated classification. The noncombustible fiber fill also acts as sound deadening material eliminating the transfer of sound between floors. Suitable for commercial, multi-family and residential applications.

FEATURES



- 4.25" Frame height for easy compact installation
- cULus certified 2-hour fire-rated
- Rated for direct contact with insulation
- ASTM-E283 Air-Tight rated enclosure
- Applicable for IC and Non-IC rated ceiling
- LED quick connect provided
- Extend up to 24-1/2" bar hangers with captive nails
- Can be used in standard applications as sound dampening enclosure between floors
- 12.5W Maximum wattage for 4" retrofit downlight



PRODUCT IMAGES & DIMENSIONS



LS-4FR-S-IC-AT
4" Fire Rated Shallow
New Construction ICAT Housing

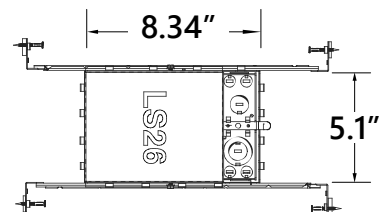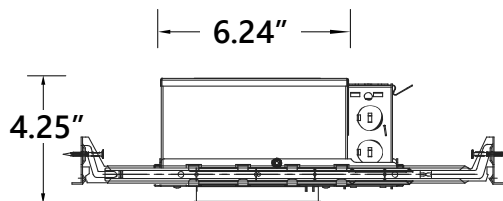

SPECIFICATIONS

PART NUMBER	WATTAGE	VOLTAGE	DIMMING	LISTING
LS-4FR-S-IC-AT	12.5W	120/277V	Triac/0-10V	cULus