



LS-4R-S-IC-AT

4" LED Dedicated Shallow Remodel ICAT Housing

Description 4" LED dedicated IC shallow housing is designed for remodel applications and suitable for use in ceiling where the housing can be direct contact with insulation. Shallow remodel housing install into existing drywall or wood ceiling with no above access. Air tight construction reduces energy costs by reducing the amount of air leakage through the ceiling.

FEATURES

- Junction Box - Listed for through branch circuit wiring. Contains three 1-1/8", five 7/8" knockouts and four Romex pryouts with strain relief.
- Ceiling Thickness - Housing adjusts from 5/8"-1 3/8" to accommodate various ceiling thickness.
- Remodel Clips - Three remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.
- Triac Dimming
- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air-Tight construction





PRODUCT IMAGES & DIMENSIONS



LS-4R-S-IC-AT

4" LED Dedicated Shallow Remodel ICAT Housing

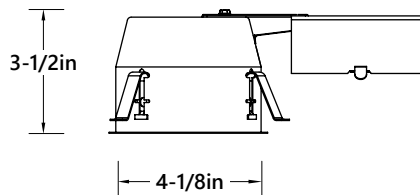

SPECIFICATIONS

Catalog Number	Size	Type	Dimming	Certificated
LS-4R-S-IC-AT	4"	LED Dedicated Shallow ICAT Remodel Housing	Triac	cULus

Compatible Trims

LSL-400 4" Round LED Retrofit Smooth Trim
LSL-403 4" Round LED Retrofit Baffle Trim
LSL-T411 4" LED Retrofit Gimbal Trim

LSL-448 4" Round LED Retrofit Smooth Trim
LSL-449 4" Round LED Retrofit Baffle Trim