



LS-CS-3RTL-G-8W-5CCT

3" Canless Selectable 5CCT Round Gimbal Trimless LED Recessed Downlight

LUMENS: 600lm


COLOR TEMPERATURE: 27K/30K/35K/40K/50K

APERTURE: Round

Description 3" selectable 5CCT round gimbal trimless LED recessed downlight included junction box which can be install directly in insulated ceiling without any thermal housing. Fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers.

FEATURES

- No housing is required - easy and fast installation
- 600lm / 8W
- Field selectable 2700K, 3000K, 3500K, 4000K and 5000K
- 90+CRI
- 38° beam angle and 30° titl
- IC rated
- 120V Triac dimming
- Available in Black or White finish
- 5 years warranty
- cETLus Listed for Wet Locations

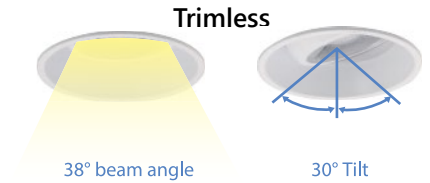

Mounting Plate Available
(Sold Separately)



LS-CS-3R-MP
3" Round Mounting Plate



Trimless




PRODUCT IMAGES & DIMENSIONS



LS-CS-3RTL-G-8W-5CCT-BL
3" Canless 5CCT Round Gimbal
Trimless, Black Finish



LS-CS-3RTL-G-8W-5CCT-WH
3" Canless 5CCT Round Gimbal
Trimless, White Finish

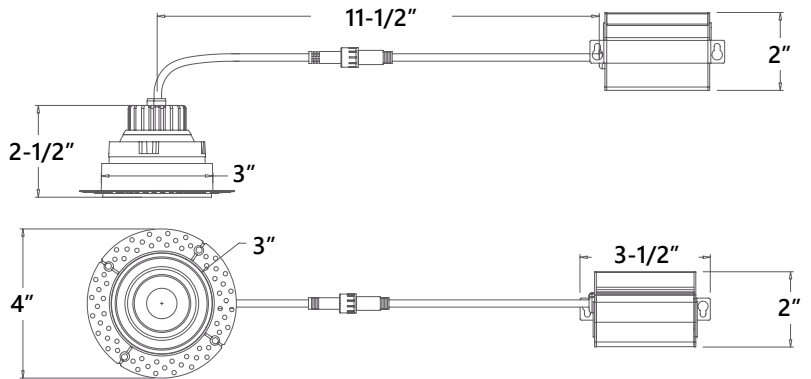

SPECIFICATIONS

PART NUMBER	SIZE	APERTURE	LUMEN/WATTAGE	SELECTABLE 5CCT	CRI	VOLTAGE	DIMMING	FINISH	LISTING
LS-CS-3RTL-G-8W-5CCT-BL	3"	Round	600lm/8W	27K/30K/35K/40K/50K	90	120V	TRIAC	Black	cETLus
LS-CS-3RTL-G-8W-5CCT-WH	3"	Round	600lm/8W	27K/30K/35K/40K/50K	90	120V	TRIAC	White	cETLus