



LS-CS-3SQTL-G-8W-5CCT

3" Canless Selectable 5CCT Square Gimbal Trimless LED Recessed Downlight

LUMENS: 600lm


COLOR TEMPERATURE: 27K/30K/35K/40K/50K

APERTURE: Square

Description 3" selectable 5CCT square gimbal trimless LED recessed downlight included junction box which can be install directly in insulated ceiling without any thermal housing. Fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers.

FEATURES



- No housing is required - easy and fast installation
- 600lm / 8W
- Field selectable 2700K, 3000K, 3500K, 4000K and 5000K
- 90+CRI
- 38° beam angle and 30° titl
- IC rated
- 120V Triac dimming
- Available in Black or White finish
- 5 years warranty
- cETLus Listed for Wet Locations

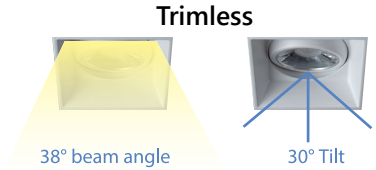

Trimless
(Sold Separately)



LS-CS-3SQ-MP
3" Square Mounting Plate

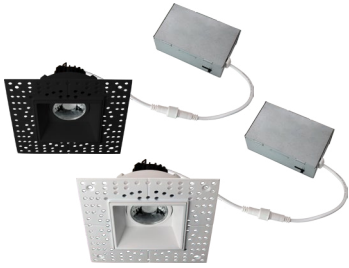

Trimless




PRODUCT IMAGES & DIMENSIONS



LS-CS-3SQTL-G-8W-5CCT-BL
3" Canless 5CCT Square Gimbal
Trimless, Black Finish



LS-CS-3SQTL-G-8W-5CCT-WH
3" Canless 5CCT Square Gimbal
Trimless, White Finish

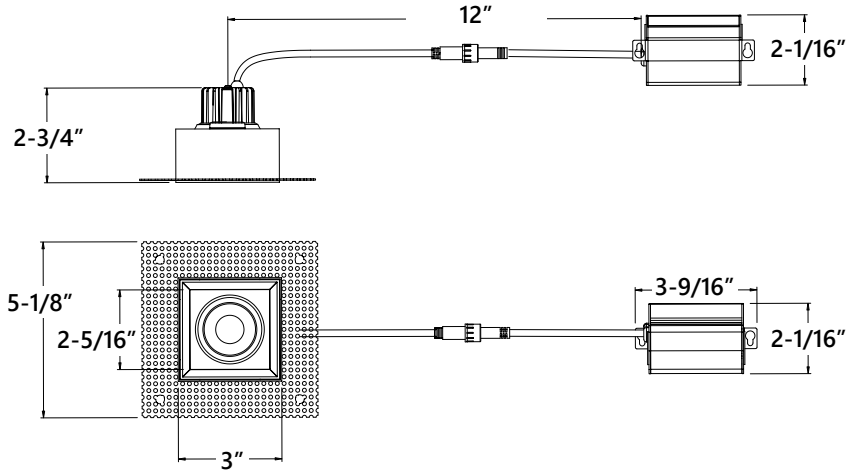

SPECIFICATIONS

PART NUMBER	SIZE	APERTURE	LUMEN/WATTAGE	SELECTABLE 5CCT	CRI	VOLTAGE	DIMMING	FINISH	LISTING
LS-CS-3SQTL-G-8W-5CCT-BL	3"	Square	600lm/8W	27K/30K/35K/40K/50K	90	120V	TRIAC	Black	cETLus
LS-CS-3SQTL-G-8W-5CCT-WH	3"	Square	600lm/8W	27K/30K/35K/40K/50K	90	120V	TRIAC	White	cETLus