



LS-CS-4SQTL-S-18W-5CCT

4" Canless Selectable 5CCT Square Smooth Trimless LED Recessed Downlight

LUMENS: 1500lm

COLOR TEMPERATURE: 27K/30K/35K/40K/50K

APERTURE: Square

Description 4" selectable 5CCT square smooth trimless LED recessed downlight included junction box which can be install directly in insulated ceiling without any thermal housing. Fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers.


FEATURES

- No housing is required - easy and fast installation
- 1500lm / 18W
- Field selectable 2700K, 3000K, 3500K, 4000K and 5000K
- 90+CRI
- 38° beam angle
- IC rated
- 120V Triac dimming
- Available in Black or White finish
- 5 years warranty
- cETLus Listed for Wet Locations



Trimless

Mounting Plate Available
(Sold Separately)



LS-CS-4SQ-MP
4" Square Mounting Plate





PRODUCT IMAGES & DIMENSIONS



LS-CS-4SQTL-S-18W-5CCT-BL
4" 18W Canless 5CCT Square Smooth Trimless, Black Finish



LS-CS-4SQTL-S-18W-5CCT-WH
4" 18W Canless 5CCT Square Smooth Trimless, White Finish

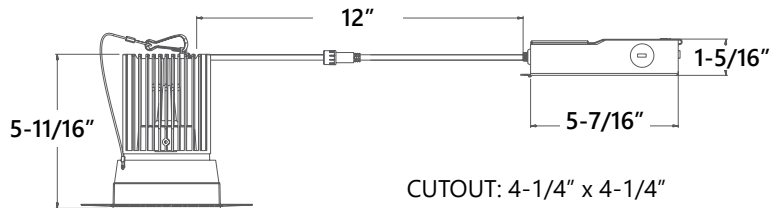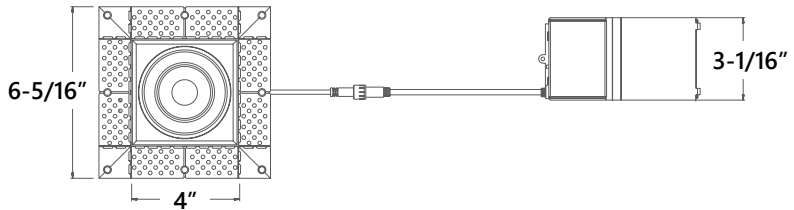

SPECIFICATIONS

PART NUMBER	SIZE	APERTURE	LUMEN/WATTAGE	SELECTABLE 5CCT	CRI	VOLTAGE	DIMMING	FINISH	LISTING
LS-CS-4SQTL-S-18W-5CCT-BL	4"	Square	1500lm/18W	27K/30K/35K/40K/50K	90	120V	TRIAC	Black	cETLus
LS-CS-4SQTL-S-18W-5CCT-WH	4"	Square	1500lm/18W	27K/30K/35K/40K/50K	90	120V	TRIAC	White	cETLus