



## LS-CS-6NWR-S-5CCT & LS-CS-6NWSQ-S-5CCT

6" Round and Square Wattage Tuning & Selectable 5CCT Anti-Glare Canless LED Downlight

LUMENS: 1600lm, 1200lm & 1000lm

COLOR TEMPERATURE: 27K/30K/35K/40K/50K

APERTURE: Round & Square

**Description** Introducing the 6" LED anti-glare downlight — a commercial-grade, architecturally styled solution that blends performance with refined aesthetics. Engineered for professional environments, this fixture features an ultra-low-glare optic for comfortable, distraction-free illumination, power-tunable functionality for precise lumen control, and 5CCT selectable color temperatures to easily match any space from warm to cool white. The luminaire ships with an external driver housed in a dedicated junction box for straightforward, code-compliant installation and simplified maintenance, while its durable construction and high-quality finish ensure long-term reliability in retail, hospitality, office, and institutional settings.

### FEATURES

- Power select: 1600lm/20W; 1200lm/15W; 1000lm/10W
- Selectable 5CCT: 2700K, 3000K, 3500K, 4000K or 5000K
- 90+ CRI
- Deep anti-glare design - no harm to eyes
- Fast & Easy Installation - Save labor cost
- Junction box included - No additional hardware required
- 100-130V, Triac dimmable
- Air-Tight & IC Rated: No housing required
- Smooth reflector in White finish
- 5-year limited warranty
- cETLus Listed



### PRODUCT IMAGES & DIMENSIONS


Unit: mm



LS-CS-6NWR-S-5CCT



LS-CS-6NWSQ-S-

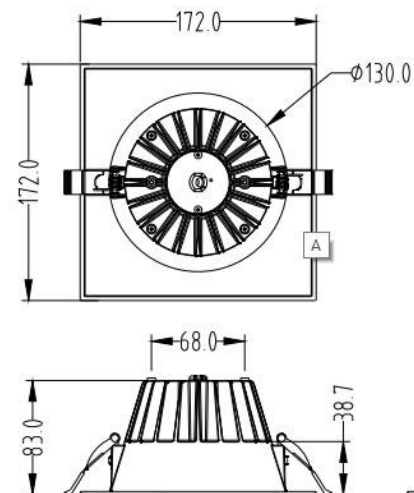

### SPECIFICATIONS

PART NUMBER	SIZE	LUMEN/WATTAGE	SELECTABLE 5CCT	VOLTAGE	DIMMING	CRI	FINISH	LISTING
LS-CS-6NWR-S-5CCT	6" Round	1600lm/20W; 1200lm/15W; 1000lm/10W	27K/30K/35K/40K/50K	100-277V	TRIAC	90+	White	cETLus
LS-CS-6NWSQ-S-5CCT	6" Square	1600lm/20W; 1200lm/15W; 1000lm/10W	27K/30K/35K/40K/50K	100-277V	TRIAC	90+	White	cETLus