



LS-CS-6RTL-S-24W-5CCT

6" Canless Selectable 5CCT Round Smooth Trimless LED Recessed Downlight

LUMENS: 1600lm

COLOR TEMPERATURE: 27K/30K/35K/40K/50K


APERTURE: Round

Description 6" selectable 5CCT round smooth trimless LED recessed downlight included junction box which can be install directly in insulated ceiling without any thermal housing. Fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers.

FEATURES

- No housing is required - easy and fast installation
- 1600lm / 24W
- Field selectable 2700K, 3000K, 3500K, 4000K and 5000K
- 90+CRI
- 38° beam angle
- IC rated
- 120V Triac dimming
- Includes two spring loaded clips to attached to ceiling
- Available in Black or White finish
- 5 years warranty
- cETLus Listed for Wet Locations

Mounting Plate Available
(Sold Separately)

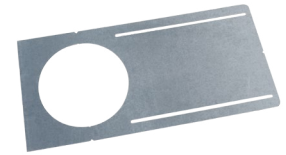

LS-CS-6R-MP
6" Round Mounting Plate



Trimless





PRODUCT IMAGES & DIMENSIONS



LS-CS-6RTL-S-24W-5CCT-BL
6" 24W Canless 5CCT Round Smooth Trimless, Black Finish



LS-CS-6RTL-S-24W-5CCT-WH
6" 24W Canless 5CCT Round Smooth Trimless, White Finish

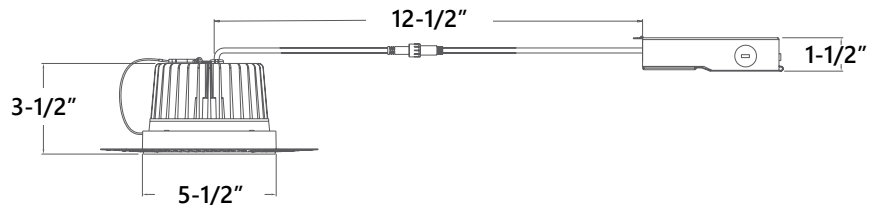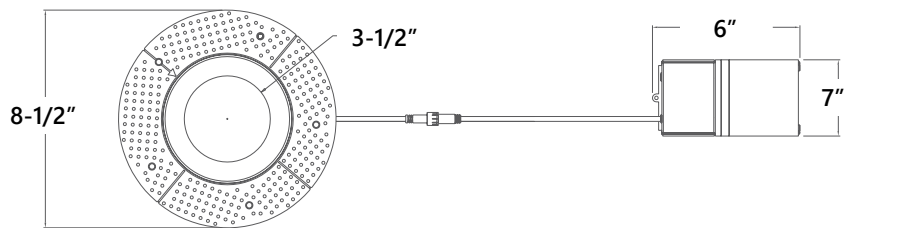

CUTOUT: 5-1-2"

SPECIFICATIONS

PART NUMBER	SIZE	APERTURE	LUMEN/WATTAGE	SELECTABLE 5CCT	CRI	VOLTAGE	DIMMING	FINISH	LISTING
LS-CS-6RTL-S-24W-5CCT-BL	6"	Round	1600lm/24W	27K/30K/35K/40K/50K	90	120V	TRIAC	Black	cETLus
LS-CS-6RTL-S-24W-5CCT-WH	6"	Round	1600lm/24W	27K/30K/35K/40K/50K	90	120V	TRIAC	White	cETLus