



LS-EEX-G / LS-EEX-R

Thermoplastic LED Exit Sign

Description Thermoplastic, compact, low profile LED compact Exit sign with battery back-up is great for commercial and industrial applications requiring a reliable, bright and energy efficient life safety solution. It can be wall, side or ceiling mounted.

FEATURES

- Energy efficient LED compact and decorative design
- 6" height with 3/4" stroke and chevron directional arrows
- Double or Single face universal pack
- Dual 120/277 voltage
- 90 minutes emergency operation
- Injection-molded thermoplastic housing
- 5 years warranty on all electronics and housing
- cULus Listed for Damp Location

Mounting Wall, side or ceiling. Universal knockouts on back plate allow for wall mounting directly to standard J-Box. Canopy and mounting hardware provided.

Lamps 1W LED at 120V & 277V. LED lamps are operating in normal (AC input) and Emergency (DC input) modes. LEDs have a minimum rated lamp life of 100,000 hours.

Battery 1.2V long-life maintenance-free and rechargeable Ni-Cad battery. LVD (Low Voltage Disconnection) prevents battery from deep discharge.




PRODUCT IMAGES & DIMENSIONS



LS26-EEX-G
Thermoplastic LED Exit Sign,
Green Letters



LS-EEX-R
Thermoplastic LED Exit Sign,
Red Letters

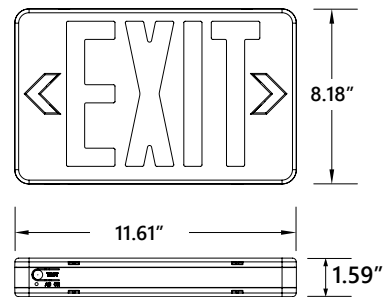

SPECIFICATIONS

PART NUMBER	WATTAGE	VOLTAGE	EMERGENCY DURATION	LETTER COLOR	HOUSING FINISH	LISTING
LS-EEX-G	1W	120/277V	90 Minutes	Green	White	cULus
LS-EEX-R	1W	120/277V	90 Minutes	Red	White	cULus