



LS-PC-2-23W-5CCT/ LS-PC-3-31W-5CCT/LS-PC-4-39W-5CCT

2ft./3ft./4ft Wattage Tuning & Selectable 5CCT Tube Linear Architectural Light

LUMENS: 80-90lm/W

COLOR TEMPERATURE: 27K/30K/35K/40K/50K

MOUNTING: Pendant Mount

Description The LED Tube Linear Architectural Light delivers refined illumination and flexible installation for modern interiors, offering both vertical and horizontal pendant mounting to suit creative design layouts. Engineered for performance and convenience, each fixture features a polished chrome end cap with a matching canopy kit for a seamless, high-end finish; four-step wattage tuning lets you tailor output for task or ambient lighting, while selectable 5CCT enables instant choice of color temperature from warm to cool whites. Built-in surge protection safeguards the luminaire and downstream circuitry for long-term reliability, and the series is available in 2ft, 3ft, and 4ft lengths to accommodate a wide range of spaces and specifications.

FEATURES

- Wattage tuning: (2ft.) 17W/19W/21W/23W (3ft.) 25W/27W/29W/31W, (4ft.) 33W/35W/37W/39W
- Selectable 5CCT (27K/30K/35K/40K/50K)
- 80lm/W at 27K-40K; 90lm/W at 50K
- Vertical & Horizontal Pendant mount
- Chrome end cap with white canopy kit
- Opal lens
- Surge protector
- Class I/P driver, 120-277V 50/60Hz
- 0-10V & Triac Dimming
- 50,000 Hours Life



PRODUCT IMAGES & DIMENSIONS



LS-PC-2-23WT-5CCT


2ft. - 17W/19W/21W/23W Tuning
White finish

LS-PC-3-31WT-5CCT

3ft. - 25W/27W/29W/31W Tuning
White finish

LS-PC-4-39WT-5CCT

4ft. - 33W/35W/37W/39W Tuning
White finish

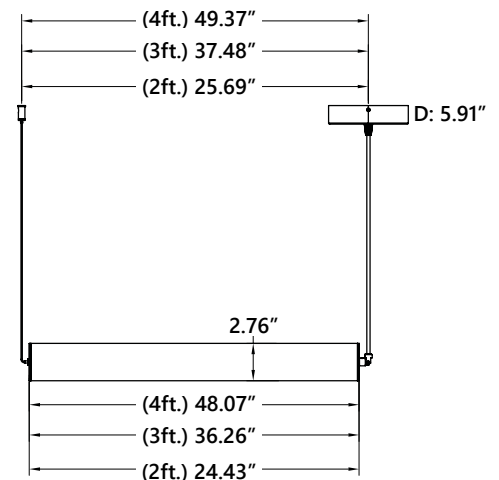

SPECIFICATIONS

PART NUMBER	LENGHT	SELECTABLE WATTAGE	EFFICACY	SELECTABLE 5CCT	VOLTAGE	DIMMING	CRI	FINISH	LISTING
LS-PC-2-23WT-5CCT	2FT	17W/19W/21W/23W	80-90lm/W	27K/30K/35K/40K/50K	120-277V	0-10V	80+	White	cULus
LS-PC-3-31WT-5CCT	3FT	25W/27W/29W/31W	80-90lm/W	27K/30K/35K/40K/50K	120-277V	0-10V	80+	White	cULus
LS-PC-4-39WT-5CCT	4FT	33W/35W/37W/39W	80-90lm/W	27K/30K/35K/40K/50K	120-277V	0-10V	80+	White	cULus