



## LS-SC-(10/15/23)-12W-5CCT

10"/15"/23" 12W Selectable 5CCT Surface Adjustable Cylinder Light

**LUMENS:** 90-105lm/W

**COLOR TEMPERATURE:** 27K/30K/35K/40K/50K


**MOUNTING:** Surface Mount

**Description** Introducing the surface mount adjustable Cylinder Light — a versatile, stylish 12W lighting solution that combines modern design with customizable performance to enhance any space. Available in three different lengths to suit a variety of mounting heights and visual proportions, this slim cylinder is perfect for residential and commercial applications where a minimalist aesthetic and precise illumination are desired.


### FEATURES

- 1080-1260lm / 12W
- Selectable 5CCT (27K/30K/35K/40K/50K)
- 90-105lm/W Efficiency
- Adjustable head: 90° vertically & 359° Horizontally
- Surface mount with Rod & Cord Pendant option available
- PC lens, high flame-retardant point
- 120-277V 50/60Hz
- 0-10V Dimming
- 50,000 Hours Life
- 5 Year Limited Warranty
- cULus Listed


### Surface Mount

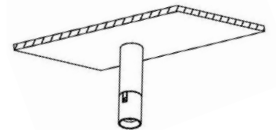


### Cord Pendant Mount (Kit Sold Separately)

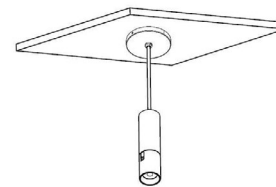

### Rod Pendant Mount (Kit Sold Separately)

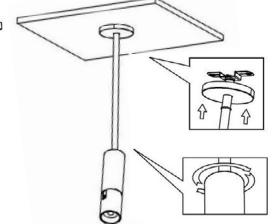

### Adjustable Head





## PRODUCT IMAGES & DIMENSIONS



**LS-SC-10-12W-5CCT**  
(10" - Black finish)

**LS-SC-15-12W-5CCT**  
(15" - Black finish)

**LS-SC-23-12W-5CCT**  
(23" - Black finish)

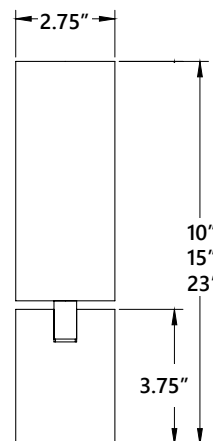

## SPECIFICATIONS

| PART NUMBER              | LENGTH | LUMEN / WATTAGE | EFFICACY   | SELECTABLE 5CCT     | VOLTAGE  | DIMMING | CRI | FINISH | LISTING |
|--------------------------|--------|-----------------|------------|---------------------|----------|---------|-----|--------|---------|
| <b>LS-SC-10-12W-5CCT</b> | 10"    | 1080-1260lm/12W | 90-105lm/W | 27K/30K/35K/40K/50K | 120-277V | 0-10V   | 80+ | Black  | cULus   |
| <b>LS-SC-15-12W-5CCT</b> | 15"    | 1080-1260lm/12W | 90-105lm/W | 27K/30K/35K/40K/50K | 120-277V | 0-10V   | 80+ | Black  | cULus   |
| <b>LS-SC-23-12W-5CCT</b> | 23"    | 1080-1260lm/12W | 90-105lm/W | 27K/30K/35K/40K/50K | 120-277V | 0-10V   | 80+ | Black  | cULus   |



## LS-SC-(10/15/23)-12W-5CCT

10"/15"/23" Wattage Tuning & Selectable 4CCT Modern Ring Pendant Up&Down Light

### ACCESSORIES



#### LS-SC-KIT-4-BL

4" Junction Box for  
Surface Canopy Kit  
Black




#### LS-PC-KIT-5-BL

5" Canopy Power with  
48" Power Feed Cable  
Suspension kit - Black

### PHOTOMETRIC

Luminous Intensity Distribution Curve

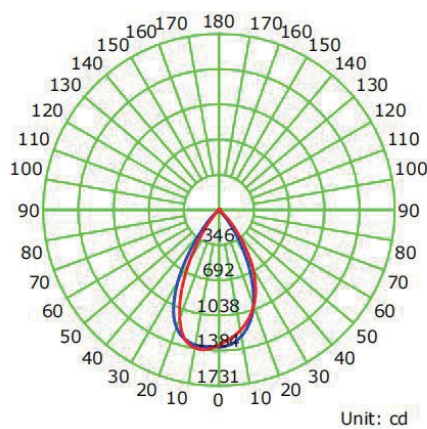

|                       |               |
|-----------------------|---------------|
| Luminaire             | 5000K         |
| Input Voltage (VAC)   | 120-277V      |
| Power (W)             | 12.07W        |
| Delivered Lumen (LM)  | 1186Lm        |
| Efficacy (Lm/W)       | 98.31 Lm/W    |
| Beam Angle            | 59.3H / 57.6V |
| Power Factor (PF)     | >95           |
| Color Rendering Index | >80 CRI       |