

LIGHTING SPOT²⁶

Efix Frameless LED Slim Surface Mount Panel Light

Key Features

- Easy Installed by one person
- Low Glare UGR 24
- IP20 / IK04
- Intelligent Energy Conservation and Environmental Protection
- Uniformity is Greater Than 0.9
- CCT & Wattage Adjustable




ELECTRICAL

VOLTAGE	AC120-277V 50~60Hz
POWER FACTOR	≥0.9
DIMMABLE	Triac dimming (120V), 0-10V dimming (277V)
UGR	<24
Beam Angle	95 Degrees

PERFORMANCE


WARRANTY	5 YEAR
CERTIFICATIONS	FCC, ETL, ROHS, JAB & T24
Storage Temperature	-40~+80 °C
Working Temperature	-20~+45 °C
CCT	2700K/3000K/3500K/4000K/5000K
SDCM	≤ 5
CRI	RA90
THD	<20%
Protection Level	IP20 / IK04
Environment	Damp Location
Fixture Material	AL6063+PC Diffuser
Fixture Finish	White RAL9003

DIMENSION

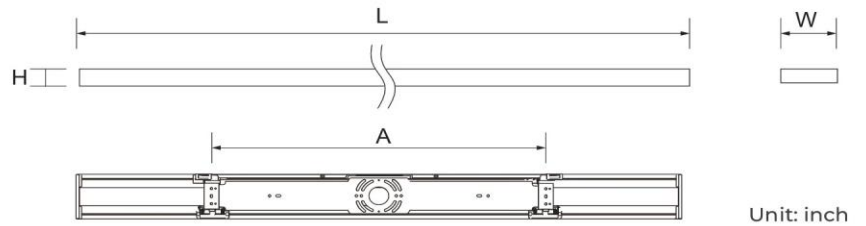

Model No	L	W	H	A
P70S15120	47.75"	5.9"	1.54"	22.4"
P70S15180	71.38"	5.9"	1.54"	38.2"
P70S15240	95"	5.9"	1.54"	42.1"

BEAM ANGLE

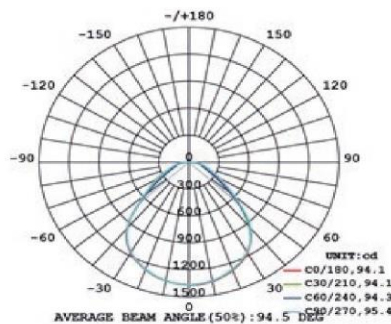

ENERGY CHART

MODEL NO	SIZE inches	WATTAGE	EFFICIENCY lm/w	DELIVERED LUMENS	CCT
P70S15120	L47.75"*W5.9"*H1.54"	20/30/40W	125LM/W±10%	5000LM±10%	2700K 3000K 3500K 4000K 5000K
P70S15180	L71.38"*W5.9"*H1.54"	36/48/60W	100LM/W±10%	6000LM±10%	
P70S15240	L95"*W5.9"*H1.54"	40/60/80W	125LM/W±10%	10000LM±10%	