

LIGHTING SPOT₂₆

XRim LED Round Panel Light

5CCT Selectable

(2700K/3000K/3500K/4000K/5000K)

Key Features

- Frameless design, back-lit emitting, smooth light output
- Easy installation by twist-and-lock brackets
- Can fit for a variety of decorative styles
- 5CCT Selectable: 2700K/3000K/3500K/4000K/5000K




6" | 8" | 11"



PERFORMANCE

WARRANTY	5 YEAR
CERTIFICATIONS	FCC, ETL, RHOS, T24&JA8
RATE LIFE	>50,000 HOURS
OPERATING TEMPERATURE	-10°C TO + 45°C
STORAGE TEMPERATURE	-20°C TO + 65°C
HUMIDITY RANGE	20-85%
CCT	2700K/3000K/3500K/4000K/5000K
SDCM	≤ 6
CRI	RA90
R9	> 0
BEAM ANGLE	120°
Environment	Damp Location
FIRE RATING	V0
HOUSING	Metal+ WHITE PC (RAL9003)

MOUNTING OPTIONS



6" 8" 11"
twist-and-lock
brackets

ELECTRICAL

VOLTAGE	120V AC 60HZ
POWER FACTOR	≥0.9
DIMMABLE	TRIAC DIMMING
SURGE PROTECTION	0.5KV
FLICKER	<30%

ENERGY CHART


MODEL NO	SIZE inches	WATTAGE	DELIVERED LUMENS	EFFICIENCY lm/w	CCT
P586-K129-X120B5T-W2	6"	12W	960LM±5%	80LM/W±5%	2700K 3000K
P588-K189-X120B5T-W2	8"	18W	1500LM±5%	85LM/W±5%	3500K 4000K
P5811-K249-X120B5T-W2	11"	24W	2000LM±5%	85LM/W±5%	5000K

LIGHTING SPOT₂₆

RECOMMENDED DIMMERS

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	PD-6WCL	6672	RNL06
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M	6674	IPL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	MACL-153M//MA-R	DSL06	

DIMENSION

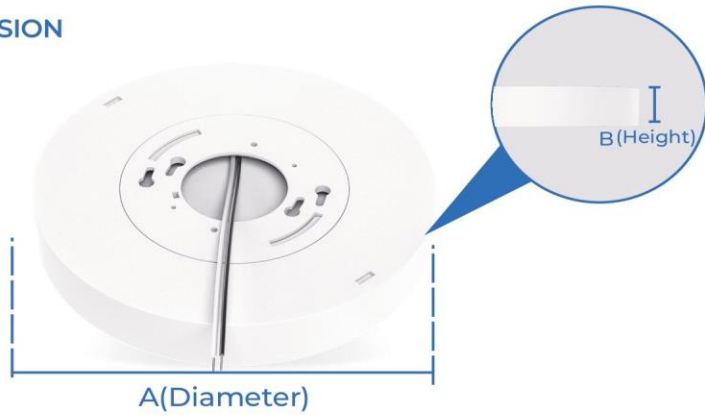

Dimension(Inch)	A (Diameter)	B (Height)
6"	6.22"	1.22"
8"	8"	1.34"
11"	11"	1.34"

COMPATIBLE DECORATIVE TRIMS



C36 Suitable for XRim
 Φ6.28**H1.28"
 Φ8.06**H1.40"
 Φ11.08**H1.40"



Black & Gold

White & Gold

C27 Suitable for XSlim/XRim/Thim
 Φ12.60**H3.78"
 Φ15.35**H3.78"



White/Black

P21 Suitable for XSlim/XRim/Thim

Ceiling cup Φ4.92**H0.87"
 Base Φ4.45**H3.15"



Black

P23 Suitable for XSlim/XRim/Thim

Φ15.75**H6.61"
 Φ19.10**H7.80"
 Φ22.32**H8.86"



Black

P24 Suitable for XSlim/XRim/Thim

Φ14.69**H6.61"
 Φ17.83**H7.80"
 Φ20.83**H8.59"