

# LIGHTING SPOT<sup>26</sup>

## Thim LED Round Panel Light 5CCT Selectable (2700K/3000K/3500K/4000K/5000K)

### Key Features

- Ultra Slim Design, Edge lit low-profile, All PC housing body
- 2700K/3000K/3500K/4000K/5000K CCT Selectable
- Easy Installation by twist-and-lock brackets



5" | 7" | 9" | 12" | 16" | 19" | 24"



### ELECTRICAL

VOLTAGE	120V AC 60HZ
POWER FACTOR	≥0.9
DIMMABLE	TRIAC DIMMING
SURGE PROTECTION	0.5KV


### PERFORMANCE

WARRANTY	5 YEAR
CERTIFICATIONS	T24&JA8, FCC, ROHS, ETL
RATE LIFE	>50,000 HOURS
OPERATING TEMPERATURE	-10°C TO + 45°C
CCT	2700K/3000K/3500K/4000K/5000K
SDCM	≤ 6
CRI	RA90
R9	> 0
BEAM ANGLE	120°
Environment	Damp Location
FIRE RATING	V0
HOUSING PC	WHITE PC (RAL9003)

### ENERGY CHART

MODEL NO	SIZE inches	WATTAGE	EFFICIENCY lm/w	DELIVERED LUMENS	CCT
P615-K119-X120B5T-W1	5"	11W	56LM/W±5%	620LM±5%	2700K 3000K 3500K 4000K 5000K
P615-K119-X120B5T-W2	5"	11W	52LM/W±5%	570LM±5%	
P617-K129-X120B5T-W1	7"	12W	67LM/W±5%	800LM±5%	
P617-K129-X120B5T-W2	7"	12W	61LM/W±5%	730LM±5%	
P619-K189-X120B5T-W1	9"	18W	70LM/W±5%	1260LM±5%	
P619-K189-X120B5T-W2	9"	18W	61LM/W±5%	1100LM±5%	
P6112-K249-X120B5T-W1	12"	24W	71LM/W±5%	1700LM±5%	
P6112-K249-X120B5T-W2	12"	24W	65LM/W±5%	1560LM±5%	
P6116-K309-X120B5T-W1	16"	30W	80LM/W±5%	2400LM±5%	
P6116-K309-X120B5T-W2	16"	30W	73LM/W±5%	2200LM±5%	
P6119-K369-X120B5T-W1	19"	36W	78LM/W±5%	2800LM±5%	
P6119-K369-X120B5T-W2	19"	36W	72LM/W±5%	2600LM±5%	
P6124-K459-X120B5T-W1	24"	45W	80LM/W±5%	3600LM±5%	
P6124-K459-X120B5T-W2	24"	45W	73LM/W±5%	3300LM±5%	

### DIMENSION

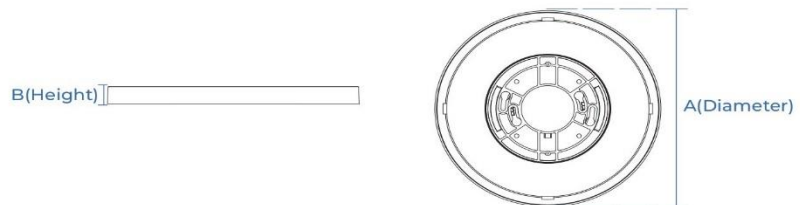

### MOUNTING



only for 5"  
Twist Bracket

7"-16" twist-and  
lock brackets

19" & 24" twist-and  
-lock brackets

DIMENSION	A (Diameter)	B (Height)
5"	135mm	18mm
7"	180mm	18mm
9"	225mm	18mm
12"	300mm	18mm
16"	400mm	18mm
19"	480mm	28mm
24"	600mm	28mm

### RECOMMENDED DIMMERS

LUTRON				LEVITON	
DVCL-153P-WH	DVELV-300P-WH	S-600P-WH	MACL-153M-WH	6674	6615-POW
DVSCCL-153P-ES	PD-6WCL, Caseta Wireless dimmer	SELV-300P-IV	DVWCL-153PH-WH	6633	RHCL453PW
DVCL-253P-WH	CTCL-153P-IV	AYCL-253P-WH		TSLO6-1LW	

# LIGHTING SPOT<sup>26</sup>

## COMPATIBLE DECORATIVE TRIMS



Matte Black

Satin Nickel

**C25** Suitable for XSlim Thim

Φ5.38\*\*0.56"H.  
Φ7.15\*\*0.56"H.  
Φ8.94\*\*0.56"H.  
Φ11.87\*\*0.56"H.  
Φ15.02\*\*0.56"H.



Black & Gold

White & Gold

**C26** Suitable for XSlim Thim

Φ5.38\*\*1.2"H.  
Φ7.15\*\*1.2"H.  
Φ8.94\*\*1.2"H.  
Φ11.87\*\*1.2"H.  
Φ15.02\*\*1.2"H



Black & Gold

White & Gold

**C27** Suitable for XSlim/XRim/Thim

Φ12.6\*\*3.8"H.  
Φ15.35\*\*3.8"H.



Black

White

**C32** Suitable for XSlim Thim

Φ5.47\*\*6"H.  
Φ7.24\*\*6"H.  
Φ9.02\*\*7"H.



Black

White

**C28** Suitable for XSlim Thim

Φ5.38\*\*3.5"H.  
Φ7.15\*\*3.5"H.



Black

White

**C29** Suitable for XSlim Thim

Φ5.38\*\*2"H.  
Φ7.15\*\*2"H.



White/Black

**P21** Suitable for XSlim/XRim/Thim

Ceiling Cup:Φ4.92\*\*0.9"H.  
Base:Φ4.5\*\*3.2"H.



White/Black

**P22** Suitable for XSlim Thim

Φ5.38\*\*3.5"H.  
Φ7.15\*\*3.5"H.



Black

**P23** Suitable for XSlim/XRim/Thim

Φ15.75\*\*6.61"dp.\*120"H.(Max)  
Φ19.1\*\*7.8"dp.\*120"H.(Max)  
Φ22.32\*\*8.86"dp.\*120"H.(Max)



Black

**P24** Suitable for XSlim/XRim/Thim

Φ14.69\*\*6.61"dp.\*120"H.(Max)  
Φ17.83\*\*7.8"dp.\*120"H.(Max)  
Φ20.82\*\*8.86"dp.\*120"H.(Max)