

Thim LED Round Panel Light

5CCT Selectable (2700K/3000K/3500K/4000K/5000K)

Key Features

- Ultra Slim Design,Edge lit low-profile, All PC housing body
- 2700K/3000K/3500K/4000K/5000K CCT Selectable
- Easy Installation by twist-and-lock brackets

5" | 7" | 9" | 12" | 16" | 19" | 24"

90 CRI

5 YEAR WARRANTY

TRIAC+ LED DRIVER

50,000 HOURS

DAMP LOCATION

ELECTRICAL

VOLTAGE	120V AC 60HZ
POWER FACTOR	≥0.9
DIMMABLE	TRIAC DIMMING
SURGE PROTECTION	0.5KV

ENERGY CHART


MODEL NO	SIZE inches	WATTAGE	EFFICIENCY lm/w	DELIVERED LUMENS	CCT
P615-K119-X120B5T-W1	5"	11W	56LM/W±5%	620LM±5%	2700K 3000K 3500K 4000K 5000K
P615-K119-X120B5T-W2	5"	11W	52LM/W±5%	570LM±5%	
P617-K129-X120B5T-W1	7"	12W	67LM/W±5%	800LM±5%	
P617-K129-X120B5T-W2	7"	12W	61LM/W±5%	730LM±5%	
P619-K189-X120B5T-W1	9"	18W	70LM/W±5%	1260LM±5%	
P619-K189-X120B5T-W2	9"	18W	61LM/W±5%	1100LM±5%	
P6112-K249-X120B5T-W1	12"	24W	71LM/W±5%	1700LM±5%	
P6112-K249-X120B5T-W2	12"	24W	65LM/W±5%	1560LM±5%	
P6116-K309-X120B5T-W1	16"	30W	80LM/W±5%	2400LM±5%	
P6116-K309-X120B5T-W2	16"	30W	73LM/W±5%	2200LM±5%	
P6119-K369-X120B5T-W1	19"	36W	78LM/W±5%	2800LM±5%	
P6119-K369-X120B5T-W2	19"	36W	72LM/W±5%	2600LM±5%	
P6124-K459-X120B5T-W1	24"	45W	80LM/W±5%	3600LM±5%	
P6124-K459-X120B5T-W2	24"	45W	73LM/W±5%	3300LM±5%	

PERFORMANCE

WARRANTY	5 YEAR
CERTIFICATIONS	T24&JA8, FCC, ROHS, ETL
RATE LIFE	>50,000 HOURS
OPERATING TEMPERATURE	-10°C TO + 45°C
CCT	2700K/3000K/3500K/4000K/5000K
SDCM	≤ 6
CRI	RA90
R9	>0
BEAM ANGLE	120°
Environment	Damp Location
FIRE RATING	V0
HOUSING PC	WHITE PC (RAL9003)


DIMENSION

B(Height)



A(Diameter)


MOUNTING



only for 5"
Twist Bracket



7"-16" twist-and
lock brackets



19" & 24" twist-and
-lock brackets

DIMENSION	A (Diameter)	B (Height)
5"	135mm	18mm
7"	180mm	18mm
9"	225mm	18mm
12"	300mm	18mm
16"	400mm	18mm
19"	480mm	28mm
24"	600mm	28mm

RECOMMENDED DIMMERS

LUTRON				LEVITON	
DVCL-153P-WH	DVELV-300P-WH	S-600P-WH	MACL-153M-WH	6674	6615-POW
DVSCCL-153P-ES	PD-6WCL, Caseta Wireless dimmer	SELV-300P-IV	DVWCL-153PH-WH	6633	RHCL453PW
DVCL-253P-WH	CTCL-153P-IV	AYCL-253P-WH		TSLO6-1LW	

COMPATIBLE DECORATIVE TRIMS



Matte Black

Satin Nickel

C25 Suitable for **XSlim Thim**

Φ5.38"*0.56"H.
Φ7.15"*0.56"H.
Φ8.94"*0.56"H.
Φ11.87"*0.56"H.
Φ15.02"*0.56"H.



Black & Gold

White & Gold

C26 Suitable for **XSlim Thim**

Φ5.38"*1.2"H.
Φ7.15"*1.2"H.
Φ8.94"*1.2"H.
Φ11.87"*1.2"H.
Φ15.02"*1.2"H.



Black & Gold

White & Gold

C27 Suitable for **XSlim/XRim/Thim**

Φ12.6"*3.8"H.
Φ15.35"*3.8"H.



Black

White

C32 Suitable for **XSlim Thim**

Φ5.47"*6"H.
Φ7.24"*6"H.
Φ9.02"*7"H.



Black

White

C28 Suitable for **XSlim Thim**

Φ5.38"*3.5"H.
Φ7.15"*3.5"H.



Black

White

C29 Suitable for **XSlim Thim**

Φ5.38"*2"H.
Φ7.15"*2"H.



White/Black

P21 Suitable for **XSlim/XRim/Thim**

Ceiling Cup:Φ4.92"*0.9"H.
Base:Φ4.5"*3.2"H.



P22 Suitable for **XSlim Thim**

Φ5.38"*3.5"H.
Φ7.15"*3.5"H.


White/Black



Black

P23 Suitable for **XSlim/XRim/Thim**

Φ15.75"*6.61"dp.*120"H.(Max)
Φ19.1"*7.8"dp.*120"H.(Max)
Φ22.32"*8.86"dp.*120"H.(Max)

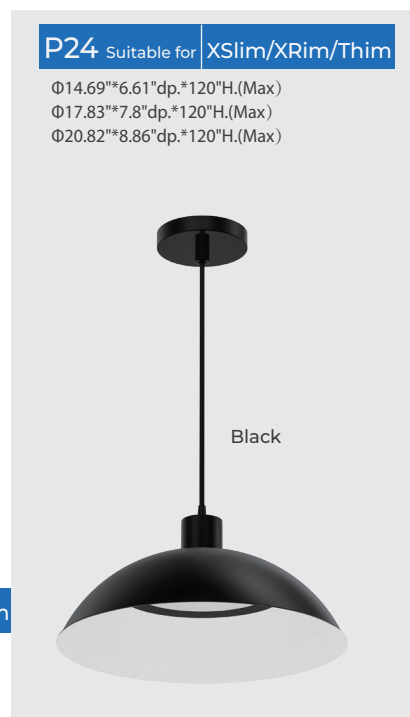

Black

P24 Suitable for **XSlim/XRim/Thim**

Φ14.69"*6.61"dp.*120"H.(Max)
Φ17.83"*7.8"dp.*120"H.(Max)
Φ20.82"*8.86"dp.*120"H.(Max)