

# LIGHTING SPOT26


## Production Specification for Security Light 产品规格书

Product Name: 产品名称 With PIR LED SECURITY LIGHT 120V 5CCT 24W 2400lm

Product code: 产品型号 SPS-612-2VMCCT

Date: 创建日期 2026-1-15

Version NO.: 版本号 V1.0

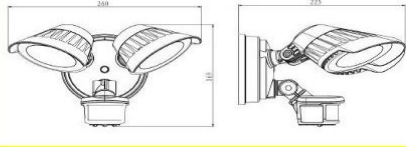


黑色 Black



白色 White



棕色 Brown

Type 类别	Technical Parameters (相关技术参数)	Product specs 产品规格
Verification of voltage standards for the exporting country (power supply needs to be calibrated using a dedicated power supply instrument)) 出口国电压标准验证 (电源需要校正过专用电源仪器)	Voltage 电压: 120V/60HZ	Fully lit at 24W 全亮24W
	Input current 输入电流 (A)	0.25A
	Dimming Traic (y/n) 调光	N
	Standby Power 待机功耗 0.7W	<0.7W
The optical parameters of the integrating sphere are measured under standard conditions of 120V/60Hz. 积分球光参数以 120V/60Hz 标准条件	LM	2400LM
	 5CCT	2700K
		3000K
		4000K
		5000K
		6500K
	CRI	80
Power Factor 功率因数	>0.7	
Initial setting at 3000k 出厂设置为3000K档位	Luminous Efficiency	>90LM/W
	Flicker 频闪要求	N/A
	Beam Angle (光束角)	100°
	Induction Angle	180°
Raliability 可靠性	Withstand voltage 耐压	1.25KV/3S/20mA
	Waterproof rating 防水等级	UL outdoor rain-exposure standard UL淋雨户外标准
	Environment	Wet location
	Operation temperature 工作温度	【-25 ° C /+40 ° C】
	Aging test standard 老化测试 标准	120V/60HZ 1H
	Aging test random inspection 老化测试 抽检	108V/60HZ 3H
	Aging test random inspection 老化测试 抽检	132V/60HZ 3H
Lifetime 宣称寿命	30000H	
Induction parameters 感应器参数	Sensor	PIR
	LUX control knob	Night--Day
	SENS control knob	Min--Max
	TIME control knob	5S--20MIN
	Power-on illumination 通电亮灯	Warm-up time upon power-on: 3-5seconds 上电温机时间 3-5秒
	<b>Constant light mode 常亮功能</b>	/
	The naked light weight 裸灯重量	880.0 ± 10%

Please note: LED Source: COB 36V LED source, no DLC certification