




LS-TPC2.5W-24V

24V 2.5W COB Tape Light

LUMENS: 200lm/ft.

COLOR TEMPERATURE: 30K/40K/50K

TYPE: COB Tape

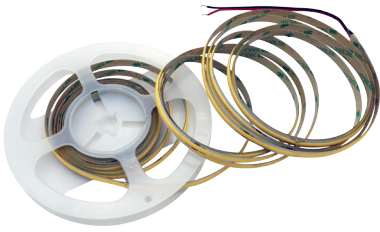

Description COB (Chip-on-Board) LED tape design provide an exceptional lighting solution characterized by their high density of chips. With up to 320 chips on the board within just 3-3/8 feet of strip, with only 1.89mm of space between each chip, these lights deliver an impressive brightness of up to 200 lumens per foot, ensuring ample illumination for various applications. The COB technology allows for a more continuous glow, minimizing dark spots and creating a seamless lighting effect. Additionally, these LED tape lights boast an efficiency of up to 90 lumens per watt, making them an energy-efficient choice for both residential and commercial settings.

FEATURES

- Up to 320 chips on board
- 200 lumens per foot
- 3000K, 4000K or 5000K CCT
- 90+CRI
- Cuttable at every 3.28ft
- Suitable for outdoor available
- CE, Rohs, UL listed



PRODUCT IMAGES & DIMENSIONS



LS-TPC2.5W-24V-5M-3K
LS-TPC2.5W-24V-20M-3K



LS-TPC2.5W-24V-5M-4K
LS-TPC2.5W-24V-20M-4K



LS-TPC2.5W-24V-5M-5K
LS-TPC2.5W-24V-20M-5K

SPECIFICATIONS

PART NUMBER	ROLL	WIDTH	WATTAGE	LUMEN/FEET	EFFICIENCY	CCT	CRI	VOLTAGE	DIMMING	MAX RUN	LISTING
LS-TPC2.5W-24V-5M-3K	16.4'	0.32"	2.5W	200LM/FT	85LM/W	3000K	90	24V	TRIAC	16'	cULus
LS-TPC2.5W-24V-5M-4K	16.4'	0.32"	2.5W	200LM/FT	85LM/W	4000K	90	24V	TRIAC	16'	cULus
LS-TPC2.5W-24V-5M-5K	16.4'	0.32"	2.5W	200LM/FT	85LM/W	5000K	90	24V	TRIAC	16'	cULus
LS-TPC2.5W-24V-20M-3K	65.6'	0.32"	2.5W	200LM/FT	85LM/W	3000K	90	24V	TRIAC	16'	cULus
LS-TPC2.5W-24V-20M-4K	65.6'	0.32"	2.5W	200LM/FT	85LM/W	4000K	90	24V	TRIAC	16'	cULus
LS-TPC2.5W-24V-20M-5K	65.6'	0.32"	2.5W	200LM/FT	85LM/W	5000K	90	24V	TRIAC	16'	cULus
R = Suitable for Outdoor											
LS-TPC2.5W-24V-5M-3K-R	16.4'	0.4"	2.5W	200LM/FT	85LM/W	3000K	90	24V	TRIAC	16'	cULus
LS-TPC2.5W-24V-5M-4K-R	16.4'	0.4"	2.5W	200LM/FT	85LM/W	4000K	90	24V	TRIAC	16'	cULus
LS-TPC2.5W-24V-5M-5K-R	16.4'	0.4"	2.5W	200LM/FT	85LM/W	5000K	90	24V	TRIAC	16'	cULus
LS-TPC2.5W-24V-20M-3K-R	65.6'	0.4"	2.5W	200LM/FT	85LM/W	3000K	90	24V	TRIAC	16'	cULus
LS-TPC2.5W-24V-20M-4K-R	65.6'	0.4"	2.5W	200LM/FT	85LM/W	4000K	90	24V	TRIAC	16'	cULus
LS-TPC2.5W-24V-20M-5K-R	65.6'	0.4"	2.5W	200LM/FT	85LM/W	5000K	90	24V	TRIAC	16'	cULus
CONNECTOR											
LS-TPC-08	Terminal LED PCB Connector, suitable for 0.32" width LED COB tape light										
LS-TPC-X08	Terminal LED PCB Connector and a 7.87" red/black 22AWG wire, suitable for 0.32" width LED COB tape light										