




- 125LPW, up to 6000lm.
- Wide housing, Minimalist styling.
- Sensor solution available.

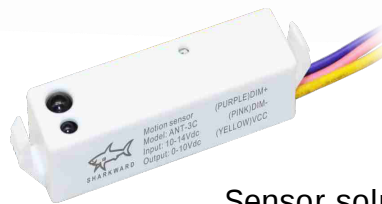

Sensor solution ANT-3C

Specifications and accessories

UL Listing:

Suitable for damp locations

LEDs:

Long-life, high-efficacy, micro-power LEDs

Lifespan:

Lumen Maintenance, L70 > 100,000 hours

Housing and Lens:

Steel sheet, Frosted PMMA lens

Finish:

Long lasting white with high durability

Ambient Operating Temperature:

-20°C (-4°F) to 50°C (122°F)

Driver:


Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.

Mounting:

Surface mounting

Dimensions

WP01 4FT

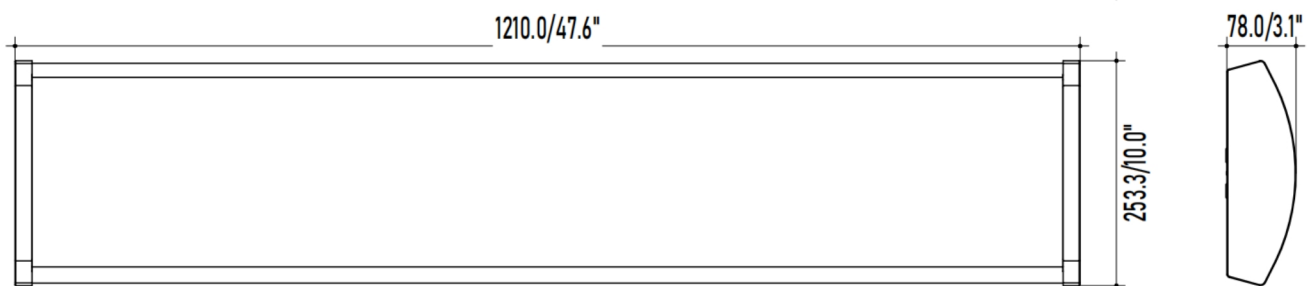

Selectable table

Catalog No.	Input Wattage	Lumens Rated	Efficacy Rated	CCT
LS-WP01-4WT-5CCT	46/38/31/24	5,800/4,800/3,800/3,000	125LPW	Selectable, 3000K&3500K&4000K&5000K & 6500K
LS-WP01-4WT-5CCT-MS	46/38/31/24	5,800/4,800/3,800/3,000	125LPW	Selectable, 3000K&3500K&4000K&5000K & 6500K

Ordering Information

ORDERING EXAMPLE: LS-WP01-4WT-5CCT-MS

Product Series	Length	CCT	MS
	-		
LS-WP01	4WT	5CCT 80 CRI, 3000K/3500K/ 4000K/5000K/ 6500K switchable	ANT-3C