



LS26-COMBO SERIES

Bernini Multi-Head LED Combo Downlight

Description A recessed LED multiple combo light featuring 1, 2, 3, or 4 LED luminaires, each producing 1200 lumens. Fully interchangeable optics makes it easy to change beam spreads in the field. Each individual LED module can be rotated 360° horizontally and 20° vertically for precise aiming. Streamlined rectangular profile fits into modern interiors. High-output LED arrays and high efficacy equal excellent performance and color quality. IC Rated: can be used in areas where insulation is required.

FEATURES

- 1200lm / 15W per head
- Triac and 0-10V Dimming option
- CCT 2700K, 3000K, 4000K, 5000K, 6000K and DW (Dim to Warm 1000K to 3000K)
- 15° Narrow, 25° Spot, 39° Flood beam angle options
- 20° Tilt and 350° rotation
- Flange or Trimless option

Construction: Heavy-gauge steel and post-painted. Adjusts to accommodate a variety of ceiling heights. Interior painted matte black for glare-free illumination, maximum heat dissipation, and zero internal reflection. Die-cast aluminum luminaire heads dissipate heat.

Installation: Field-changeable modular components let you remove and upgrade your light without replacing the junction box. The LED module and trim styles are completely interchangeable & easy to service and swap out. LED light engine and driver are replaceable, upgradeable, and can be accessed from above and below the ceiling.

Mounting: Two 13-7/8" to 25" adjustable bar hangers with captive nails are included with the housing. Bar hangers are parallel to junction box, but can be repositioned 90° perpendicular to junction box if desired. "L"-shaped bar hanger foot to align to bottom of construction joist. A T-bar notch allows for easy installation in a suspended ceiling.


Flanged & Trimless Options: Available in 4 combinations of black and white. Trim option attaches to housing with secure clips for snug fit and zero light leakage. Trimless option is secured to housing with a safety cable.

Adjustability: Amp swivel allows for precise rotation and aiming. Angle can then be locked into position without the use of tools. Each individual LED module can be rotated 360° horizontally and 20° vertically for precise aiming.

PERFORMANCE

Input Voltage:	120V; 120/277V
Wattage:	15W / 1200lm per head
Beam Spread:	15° Narrow, 25° Spot, or 39° Flood
Dimming:	Triac / 0-10V

PRODUCT IMAGES & DIMENSIONS

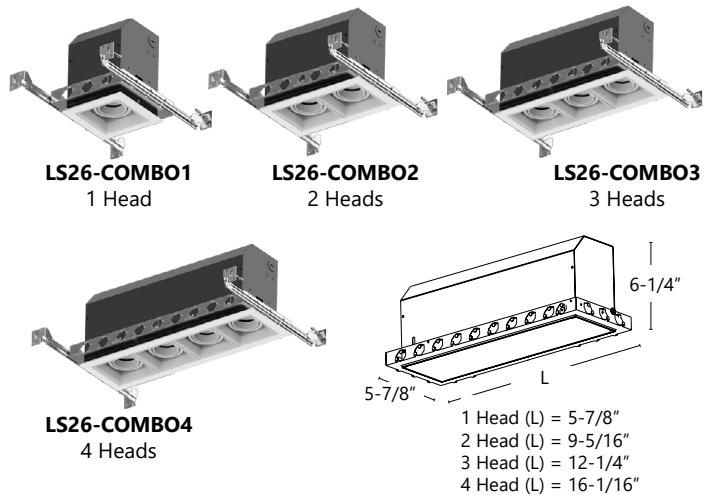

TRIM OPTIONS & FINISHES



Listings / Ratings:

- cETLus certified
- Certified to the high efficacy requirements of California Title 24 JA8-2019 (when used with compatible downlight)
- IC Rated



ORDERING CHART

Bernini Multi-Head LED Combo Downlight

SERIES	LUMEN/WATTAGE	DIMMING	BEAM SPREAD	CCT	TRIM TYPE	TRIM FINISH
LS26-COMBO1 1 Head	1200lm / 15W	0-10V	15D 15° Narrow	27 2700K 60 6000K	FT Flanged	BBK Black/Black
LS26-COMBO2 2 Heads	2400lm / 30W	TRIAC	25D 25° Spot	30 3000K DW Warm-Dim	TL Trimless	BWH Black/White
LS26-COMBO3 3 Heads	3600lm / 45W		39D 39° Flood	40 4000K 1000K-3000K		WBK White/Black
LS26-COMBO4 4 Heads	4800lm / 60W			50 5000K		WWH White/White

Example: **LS26-COMBO2130FTWWH** 2 Heads LED Combo, 2400lm/30W, 15° Narrow Beam Spread, 3000K @ 90+CRI, TRIAC Dimming, Flanged Trim, White/White Finish