



LS26-KLFP-N SERIES

2'x2' & 2'x4' Wattage Tuning & Selectable CCT LED Back-Lit Panel

SELECTABLE CCT & WATTAGE TUNING SWITCH





Description Back-lit technology offers even lighting distribution without shadowing. Featuring 3CCT selectable and wattage tuning allows for changing between 3500K, 4000K or 5000K and ranging from 30W, 35W, 40W and 50W. Back-lit panels are high efficiency solution for offices, schools, hospitality and retail areas.

FEATURES

- Field selectable 3CCT: 3500K, 4000K or 5000K
- Wattages tunable from 30W, 35W, 40W and 50W
- Can be surface mount, suspension or recessed installation (mount kit required and sold separately)
- 120-277V, 0-10V dimming
- 80 CRI
- cETLus, DLC, FCC listed
- 5 years warranty



PRODUCT IMAGES & DIMENSIONS

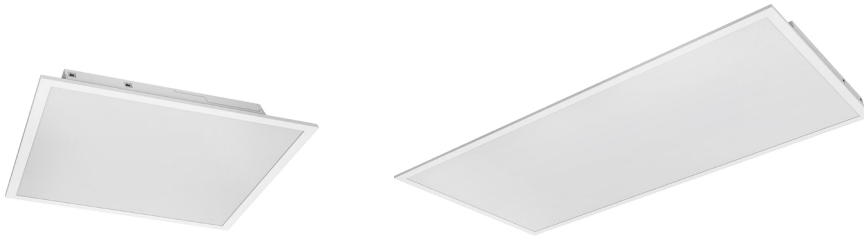

LS26-KLFP-N2X2-3CCT-WT
2'X2' Selectable 3CCT & Wattage Tuning LED Back-Lit Panel
White Finish

LS26-KLFP-N2X4-3CCT-WT
2'X4' Selectable 3CCT & Wattage Tuning LED Back-Lit Panel
White Finish

Size	L	W	H
2'x2'	23-13/16"	23-13/16"	1-5/16"
2'x4'	47-13/16"	23-13/16"	1-3/8"

SPECIFICATIONS

PART NUMBER	SIZE	LUMEN/WATTAGE TUNING	SELECTABLE 3CCT	VOLTAGE	DIMMING	LISTING	FINISH
LS26-KLFP-N2X2-3CCT-WT	2'X2'	3300lm/30W; 3850lm/35W; 4400lm/40W	35K/40K/50K	120/277V	0-10V	cETLus & DLC	White
LS26-KLFP-N2X4-3CCT-WT	2'X4'	3300lm/30W; 4400lm/40W; 5500lm/50W	35K/40K/50K	120/277V	0-10V	cETLus & DLC	White



LS-UF7 SERIES

UFO High Bay Blade Series

ACCESSORIES

SURFACE MOUNTING KIT



EMERGENCY POWER SUPPLY



SUSPENSION MOUNTING KIT



PHOTOMETRIC

LUMINOUS INTENSITY DISTRIBUTION

