



Project _____ Catalog # _____

LSB-8-T8-AB-4CCT

8ft. T8 Type A+B Selectable 4CCT LED Glass Tube

LUMENS: 2380-2600LM

COLOR TEMPERATURE: 30K/35K/40K/50K/65K

MOUNTING: Wall Mount

Description Constant power driver output when work with ballast, no LED board burn up. Great For Offices, Factories, Warehouses, Workshops, Supermarkets, Airports, And Other Commercial Applications

FEATURES

- Selectable 4CCT (35/40/50/65K)
- Wattage: Power B (42W), Power A (47W)
- Light Output: 5200lm
- G13 End Cap (converts to FA8/R17D)
- 120-277V
- 50,000 Hours Life
- Glass With Filming, Shatterproof
- Instant-On/Off
- Uniform Light Distribution
- Fits Into Existing Strip Fixtures
- 5 Year Limited Warranty




PRODUCT IMAGES & DIMENSIONS



LSB-8-T8-AB-4CCT

(8FT. 47W)

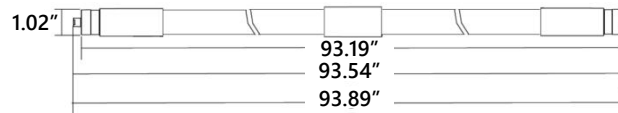

SPECIFICATIONS

PART NUMBER	LENGTH	LUMEN/WATTAGE	SELECTABLE 4CCT	VOLTAGE	DIMMING	CRI	FINISH	LISTING
LSB-8-T8-AB-4CCT	8FT.	5200lm/47W	35K/40K/50K/65K	120-277V	No	80+	White	cULus




Project _____ Catalog # _____

LSB-8-T8-AB-4CCT

8ft. T8 Type A+B Selectable 4CCT LED Glass Tube

WIRING DIAGRAM

TYPE A (Ballast Compatible) - Assembly

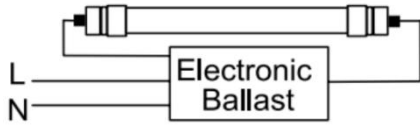

TYPE B (AC directly, double end or single end ballast bypass) Assembly

