



LSRD-3RB5CCT & LSRD-3RS5CCT

3" Selectable 5CCT LED Baffle & Smooth Reflector Retrofit Downlight

LUMENS: 630-650lm

COLOR TEMPERATURE: Selectable 5CCT

APERTURE: Round

Description 3" LED open reflector retrofit downlight is compatible with most 3" standard recessed new construction and remodel housings.

FEATURES

- 630-650lm / 10W
- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K @ 90+CRI
- Black or White finishes
- Die-cast aluminum heatsink dissipates heat from LED board
- 3 Tension clips pre-installed on unit for easy installation
- Dimming down to 10% with most dimmers
- Certified to the high efficacy requirements of California JA8 Title 24
- cULus listed
- ENERGY STAR Certified
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80



PRODUCT IMAGES & DIMENSIONS



LSRD-3RB5CCTBL
3" Baffle Reflector,
Black finish




LSRD-3RB5CCTWH
3" Baffle Reflector,
White finish



LSRD-3RS5CCTBL
3" Smooth Reflector,
Black finish



LSRD-3RS5CCTWH
3" Smooth Reflector,
White finish

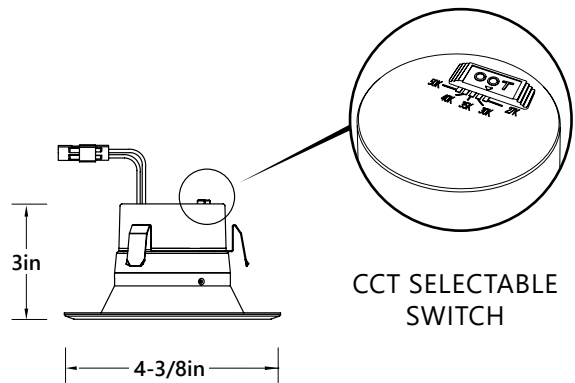

SPECIFICATIONS

Catalog Number	Size	Type/Finish	Selectable CCT / Lumen	CRI	Certificated
LSRD-3RB5CCTBL	3"	Baffle/Black	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/650lm	90+	cULus
LSRD-3RB5CCTWH	3"	Baffle/White	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/650lm	90+	cULus
LSRD-3RS5CCTBL	3"	Smooth/Black	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/650lm	90+	cULus
LSRD-3RS5CCTWH	3"	Smooth/White	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/650lm	90+	cULus