



LSRD-3SQB5CCT & LSRD-3SQS5CCT

3" Selectable 5CCT LED Square Baffle & Square Smooth Reflector Retrofit Downlight

LUMENS: 630-650lm

COLOR TEMPERATURE: Selectable 5CCT

APERTURE: Square

Description 3" LED square reflector retrofit downlight is compatible with most 3" standard recessed new construction and remodel housings.

FEATURES

- 630-650lm / 9W
- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K @ 90+CRI
- Black or White finishes
- Die-cast aluminum heatsink dissipates heat from LED board
- 3 Tension clips pre-installed on unit for easy installation
- Dimming down to 10% with most dimmers
- Certified to the high efficacy requirements of California JA8 Title 24
- cULus listed
- ENERGY STAR Certified
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80



PRODUCT IMAGES & DIMENSIONS



LSRD-3SQB5CCTBL
3" Square Baffle Reflector,
Black finish




LSRD-3SQB5CCTWH
3" Square Baffle Reflector,
White finish



LSRD-3SQS5CCTBL
3" Square Smooth Reflector,
Black finish



LSRD-3SQS5CCTWH
3" Square Smooth Reflector,
White finish

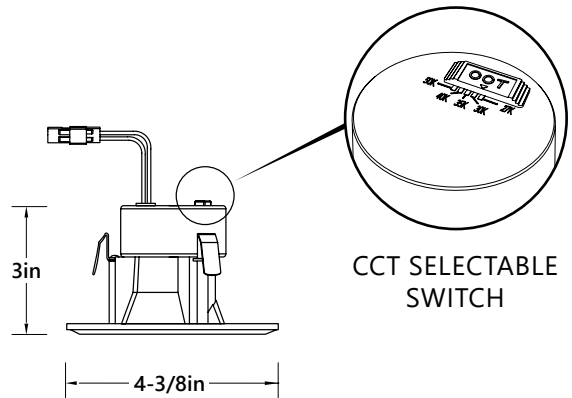

SPECIFICATIONS

Catalog Number	Size	Type/Finish	Selectable CCT / Lumen	CRI	Certified
LSRD-3SQB5CCTBL	3"	Square Baffle/Black	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/640lm	90+	cULus
LSRD-3SQB5CCTWH	3"	Square Baffle/White	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/640lm	90+	cULus
LSRD-3SQS5CCTBL	3"	Square Smooth/Black	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/640lm	90+	cULus
LSRD-3SQS5CCTWH	3"	Square Smooth/White	27K/630lm; 30K/640lm; 35K/650lm; 40K/650lm; 50K/640lm	90+	cULus