



LSRD-4R5CCTWH

4" Selectable 5CCT Slim Multi Recessed Magnetic Ring LED Downlight

LUMENS: 900lm



COLOR TEMPERATURE: Selectable 5CCT

APERTURE: Round


Description 4" selectable 5CCT Slim Multi Recessed LED downlight is compatible with standard octagon junction box or 4" standard recessed new construction and remodel housings.

FEATURES

- 900lm / 11W
- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K @ 90+CRI
- Built-in on board driver with 90mA output and 120V AC input
- Durable air-tight aluminum body with iron trim
- Compatible with standard octagon junction box
- Butterfly mounting clips available when mounting to a 4" recessed housing
- Dimming down to 10% with most dimmers
- IC rated for direct contact with insulation
- Certified to the high efficacy requirements of California JA8 Title 24
- cETLus listed for Wet Location
- ENERGY STAR Certified
- Tested in accordance with IESNA LM79 & LM80




PRODUCT IMAGES & DIMENSIONS



LSRD-4R5CCTWH

4" Slim Multi Recessed Magnetic Ring LED Downlight, White

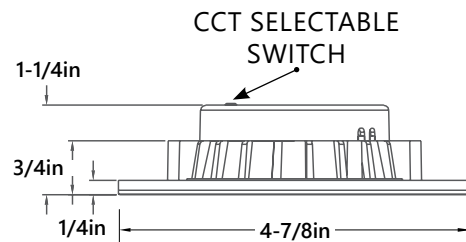

SPECIFICATIONS

Catalog Number	Size	Type/Finish	Lumen / Wattage	Selectable CCT	CRI	Certified
LSRD-4R5CCTWH	4"	Slim Round / White	900lm/11W	27K/30K/35K/40K/50K	90+	cETLus

OPTIONAL ACCESSORIES

LSRD-4RMRBL 4" Magnetic Trim Ring, Black finish

LSRD-4RMRBN 4" Magnetic Trim Ring, Brushed Nickel finish

LSRA-4BMC Butterfly mounting clip with screws for use with 4" recessed housings