



# LSRE-3RA5CCT

## 3" Selectable 5CCT LED Adjustable Gimbal Retrofit Downlight

LUMENS:760-830lm

COLOR TEMPERATURE: Selectable 5CCT

APERTURE: Round Adjustable

**Description** 3" selectable 5CCT LED adjustable gimbal retrofit is compatible with most 3" standard recessed new construction and remodel housings.

### FEATURES

- 760-830lm / 9W
- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K @ 90+CRI
- Protected LED driver performs at 120V
- Black or White finishes
- Adjustable Gimbal can be rotated 25° vertically and 358° horizontally
- Die-cast aluminum heatsink dissipates heat from LED board
- 3 Tension clips pre-installed on unit for easy installation
- Dimming down to 10% with most dimmers
- Certified to the high efficacy requirements of California JA8 Title 24
- cULus listed
- ENERGY STAR Certified
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80




### PRODUCT IMAGES & DIMENSIONS



**LSRE-3RA5CCTBK**  
3" Adjustable Gimbal,  
Black finish



**LSRE-3RA5CCTWH**  
3" Adjustable Gimbal,  
White finish

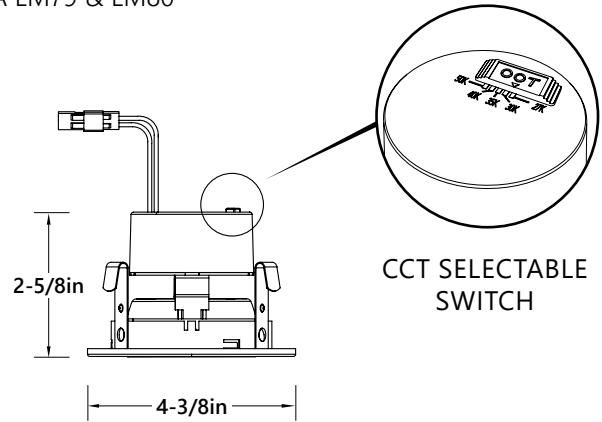

### SPECIFICATIONS

Catalog Number	Size	Type/Finish	Selectable CCT / Lumen	CRI	Certificated
LSRE-3RA5CCTBK	3"	Adjustable Gimbal/Black	27K/760lm; 30K/780lm; 35K/800lm; 40K/820lm; 50K/830lm	90+	cULus
LSRE-3RA5CCTWH	3"	Adjustable Gimbal/White	27K/760lm; 30K/780lm; 35K/800lm; 40K/820lm; 50K/830lm	90+	cULus