



# Surface Mount Frame For Backlit Panel Light / Troffer

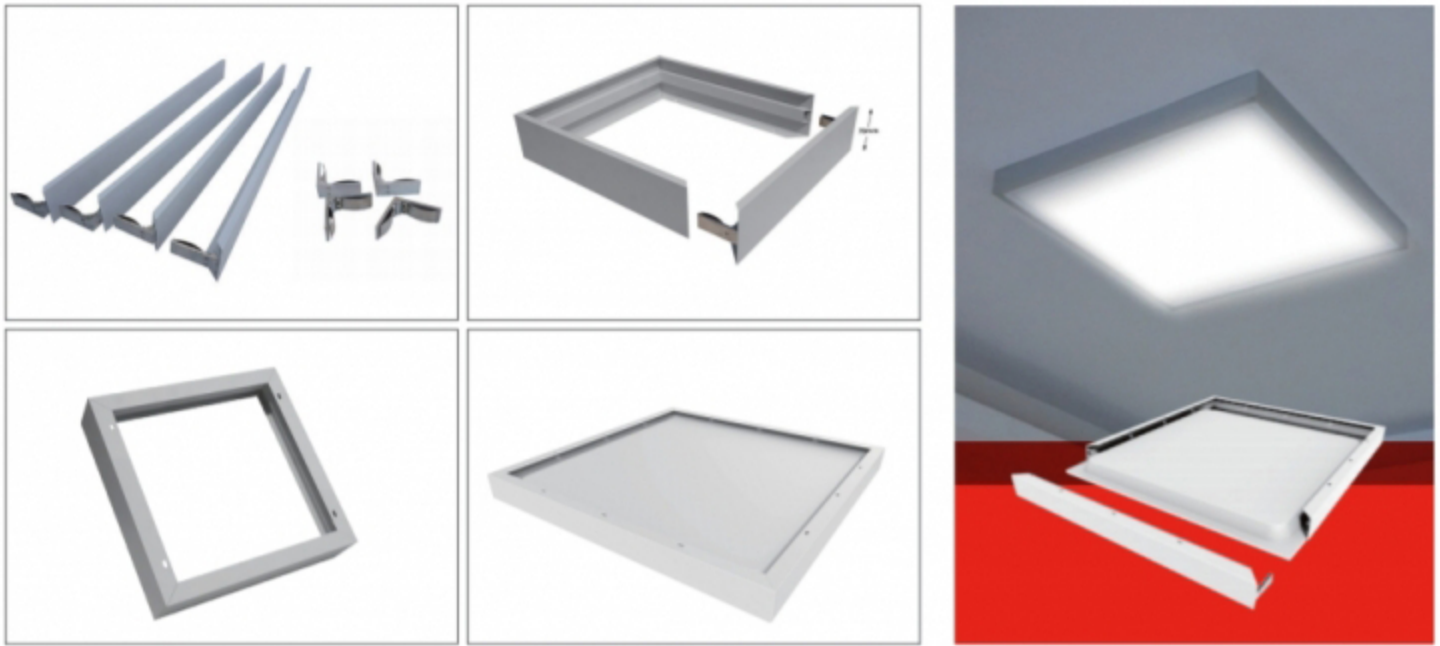

## Features

- Assembling by metal connector, tool free.
- Support for surface mount and suspending.
- Using for installation of panel light, troffer.
- 6063-T5 aluminum alloy, stable and durable.
- Designed in standard size for USA market.
- Hook mount, pendant mount and surface mount available.

## Dimension

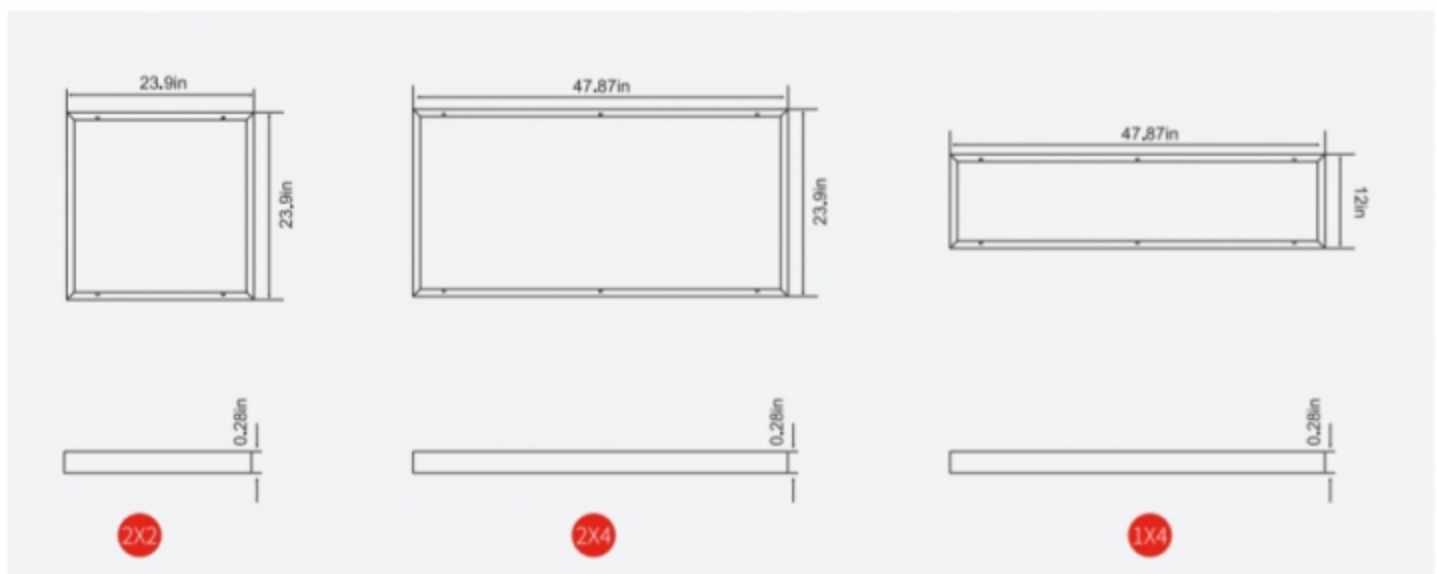

# Surface Mount Frame For Backlit Panel Light / Troffer

## Specification

Catalog Number	Finish Color	Material	Size	Dimensions	Components	To match with
LS2-2X2-FK FLANGE KIT	White	Aluminum	2X2	24*24*2.75inches	4pcs * AL frame. 4pcs * Metal connector 4pcs * Screws 4pcs * Rubber plug	LS26-GLEP 50W 2X2 CCT3 LS26-GLTR 36W 2X2 CCT3
LS2-2X4-FK FLANGE KIT	White	Aluminum	2X4	24*48*2.75inches	4pcs * AL frame 4pcs * Metal connector 6pcs * Screws 6pcs * Rubber plug	LS26-GLFP 50W 2X4 CCT3 LS26-GLTR 50W 2X4 CCT3 LS26-GLFT 50W 2X4/*K
LS2-1X4-FK FLANGE KIT	White	Aluminum	1X2	12*48*2.75inches	4pcs * AL frame 4pcs * Metal connector 6pcs * Screws 6pcs * Rubber plug	LS26-GLFP 40W 1X4 CCT3


**\*\* FLANGE KIT NOT FOR USE ON THE FIXTURES WITH EMERGENCY BATTERY BACKUP UNIT.**



## Installation Guide



**Step1:**  
Assembling together with 3 beams first with metal connector, and fix it on ceiling with screws and rubber plugs



**Step2:**  
Putting panel light fixture into the frame then, and wiring the panel light fixture.



**Step3:**  
The last step is to finish the 4th beam assembly with metal connector to form it as a whole frame on the ceiling