
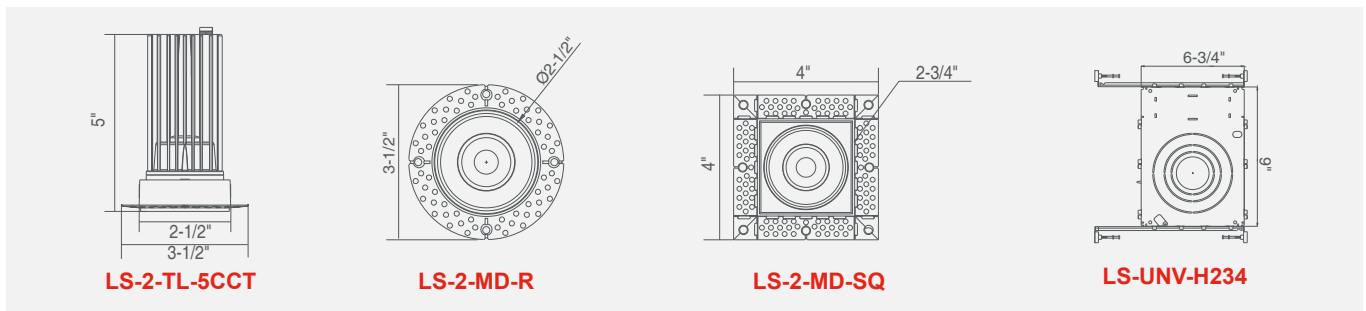


2" 5CCT Trimless Downlight

Features

- 2700/3000/3500/4000/5000K 5CCT selectable.
- Low profile, fits in tight ceilings.
- Round and square trims are available.
- Type IC rated, air-tight.
- Easy installation, no housing or junction box required.
- 100%-10% dimming range, compatible with industry standard TRIAC or ELV dimmers.
- 50000hrs long lifetime.

Dimension

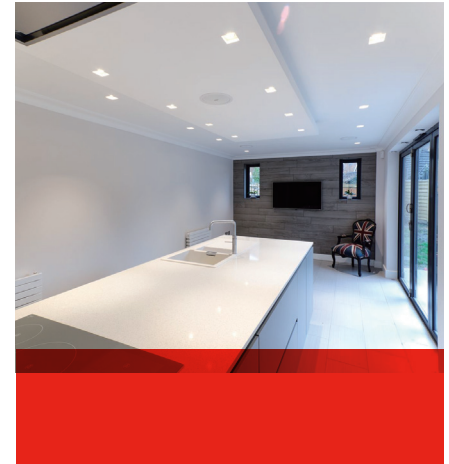

LS-2-TL-5CCT



LS-2-MD-R



LS-2-MD-SQ



LS-UNV-H234

Specification

Catalog Number	Size (L*W*D)	Input Voltage (V)	Lamp Watt (W)	Efficacy (Lumen/watt)	Lumen Output (lm)	5CCT (K)	CRI	Life Time (Hrs)
LS-2-TL-5CCT	D2-3/8"H5	120VAC	15	66.67	1000	2700/3000/3500/4000/5000	>90	50,000
LS-2-MD-R	D3-9/16"H1	--	--	--	--	--	--	--
LS-2-MD-SQ	D4"H1-1/2	--	--	--	--	--	--	--
LS-UNV-H234	D9"H6-3/4	--	--	--	--	--	--	--

