

LS-2-TL-5CCT

LED 2" 5CCT Regress Module Changeable Downlight

Catalog Number

Project Name

5CCT





Description

- 2700/3000/3500/4000/5000K 5CCT selectable.
- Interchangeable trims.
- Round and square trims, black and white finishes are available.
- Type IC rated, air-tight.
- Easy installation, no housing or junction box required.
- 100%-10% dimming range, compatible with industry standard TRIAC or ELV dimmers.
- 50000hrs long lifetime.

DELIVERED LUMENS		WATTAGE		EFFICACY	
1000 Lumens		15 watts		66 lumens/watts	
CCT	2700K/3000K/3500K/4000K/5000K	VOLTAGE	120V	TRIM OPTION	Trimless
CRI	CRI > 90	LIFE TIME	50,000 Hrs	FINISH	White, Black
DIMMING	100%-10%, TRIAC, ELV Dimmers	RATINGS	Energy Star, ETL, JA8	WARRANTY	5 years

DIMENSIONS | LISTINGS

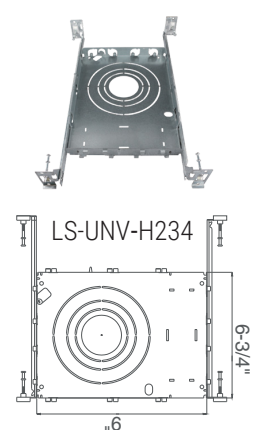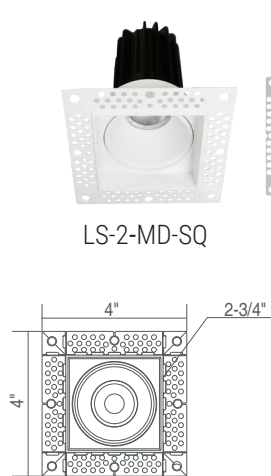

ORDERING

LS-2-TL-5CCT

SERIES	SIZE	VOLTAGE	WATTAGE	EFFICACY	LUMEN	CCT	CRI	LIFE TIME
LS-2-TL-5CCT	D2-3/8*H5	120VAC	15W	66	1000L	2700K/3000K/3500K/4000K/5000K	90+	50,000Hrs
LS-2-MD-R	D3-9/16*H1							
LS-2-MD-SQ	D4*H1-1/2							
LS-UNV-H234	D9*H6-3/4							