



LS-35-R-ICAT

3.5" LED Dedicated IC Air-Tight Remodel Housing

Description 3.5" LED dedicated IC Air-Tight housing is designed for remodel applications and suitable for use in ceiling where the housing can be direct contact with insulation. Remodel housing install into existing drywall or wood ceiling with no above access. Air-Tight construction reduces energy costs by reducing the amount of air leakages through the ceiling.

FEATURES

Junction Box: Listed for through branch circuit wiring. Contains one 1-1/8", six 7/8" knockouts and four Romex® pryouts with strain relief.

Remodel Clips: Three remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

LISTING

cULus listed for Damp Location

Certified under ASTM-E283 for Air-Tight construction

Compatible Trims:



LSRE-T35RA5CT; LSRE-T35RB5CT; LSRE-T35RS5CT; LSRE-T35SQB5CT; LSRE-T35SQS5CT



PRODUCT IMAGES & DIMENSIONS



LS-35-R-ICAT
3.5" Remodel Housing

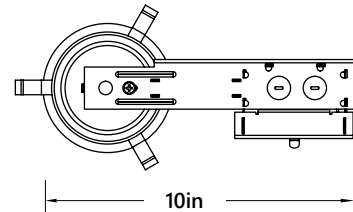

SPECIFICATIONS

Catalog Number	Size	Description	Dimming	Certificated
LS-35-R-ICAT	3.5"	LED Dedicated IC Air-Tight Remodel Housing	Triac Dimming	cULus