



LS-35FR-ICAT

3" 2hrs. Fire Rated LED Dedicated IC Air-Tight Double Wall New Construction Housing

Description 3" LED dedicated IC Air-Tight housing is UL fire rated and can be protected for 2 hours with a double wall fixture incorporates a non-combustible fiber insulation to prevent flames, toxic gases, and ignition gases from passing through. Suitable for Condominiums, Apartment Buildings, Multi-Family, Commercial and Residential applications. Air-Tight construction reduces energy costs by reducing the amount of air leakages through the ceiling.

FEATURES

Plaster Frame: Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box

Junction Box: Compact galvanized steel junction box with 24in³ internal volume. Contains on 1-1/8", one 1/2", three 7/8" knockouts and four Romex® pryouts with strain relief.

Bar Hanger: Swivel-headed bar hangers with pre-installed Real nail easily installs in regular lumber, engineered lumber. Bar Hangers are adjustable from 13-5/8" to 25" and can be repositioned 90° on plaster frame.

LISTING



cULus listed for Damp Location (Wet with specified trims)

Certified under ASTM-E283 for Air-Tight construction



Compatible Trims:

LSRE-T35RA5CT; LSRE-T35RB5CT; LSRE-T35RS5CT; LSRE-T35SQB5CT; LSRE-T35SQS5CT

PRODUCT IMAGES & DIMENSIONS



LS-35FR-ICAT
3" Fire Rated New Construction
Housing

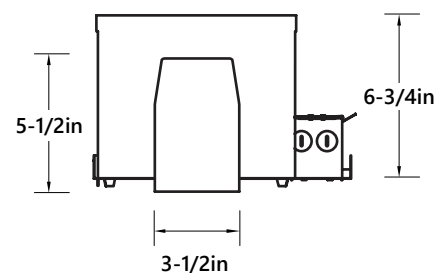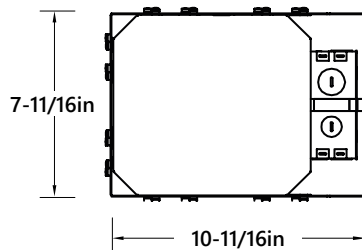

SPECIFICATIONS

Catalog Number	Size	Description	Dimming	Certificated
LS-35FR-ICAT	3"	Fire Rated LED Dedicated IC Air-Tight Double Wall New Construction Housing	Triac Dimming	cULus