

# LED 4FT Strip Light

## Features


UL: Suitable for damp locations.

Dimming: Isolate 0-10V dimming driver 120-277V.

Lifespan: 50,000-hours LED lifespan, 5 years warranty.

3CCT selectable: 3500K/4000K/5000K, surge protector.

- Low profile design optimizes shipping, storage, and handling.
- Quick release design for easy installation.
- Polycarbonate milky lens diffuse uniform lighting distribution.
- Available for suspended by steam cable, surface mounted and connective in a long row.
- Integrated smart sensor box and emergency battery are optional.
- Corridor/Storage rooms/Offices, Conference rooms/Retail, Reception areas/Hallways, Parking Garages.

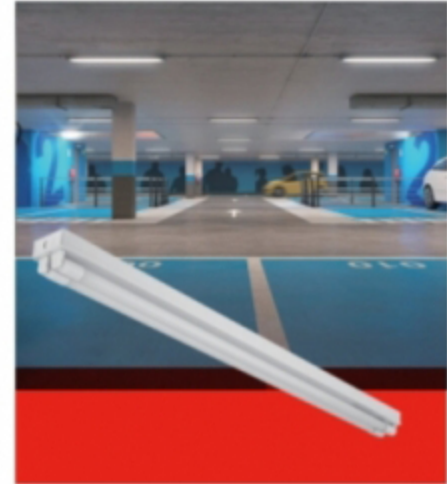

## Dimension



## Specification

Catalog Number	Size	Input Voltage (V)	Lamp Watt (W)	Efficacy (Lumen/watt)	Lumen Output (lm)	CCT (K)	CRI	Life Time (Hrs)
LS-4FT-2T840W*3CCT	4FT	120-277VAC	40	105-115	4200/4600/4200	3500/4000/5000	>80	50,000
LS-EM-4FT-2T840W*3CCT	4FT	120-277VAC	40	105-115	4200/4600/4200	3500/4000/5000	>80	50,000
LS-4FT-2T840W*3CCT/MS	4FT	120-277VAC	40	105-115	4200/4600/4200	3500/4000/5000	>80	50,000
LS-EM-4FT-2T840W*3CCT/MS	4FT	120-277VAC	40	105-115	4200/4600/4200	3500/4000/5000	>80	50,000

\*\*EM = Emergency Backup Kit; MS=Motion Sensor

