


Product Name:

LS-4DW-IC-AT

4" New Construction Double walled Housing

DIMENSIONS

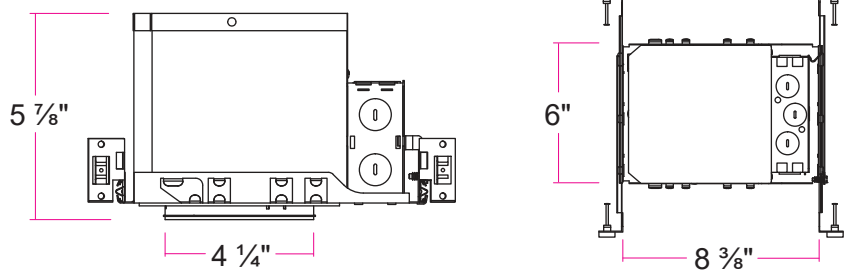

Descriptions:

Housing

- Double walled housing is for installation where the housing will be in direct contact with insulation.

Junction Box

- Listed for through branch circuit wiring.
- Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

Bar Hanger

- Pre-installed Real nail easily installs in regular lumber, engineered lumber.
- Bar Hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

Listings

- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction