

2HRS FIRE RATED

6" New Construction Recessed Housing

COMPACT, LIGHTER, EASY TO INSTALL

LS-6FR-IC-AT


6" New Construction Recessed Housing **FIRE RATED**

enclosure.

New Specification Grade. Housing Was Designed to meet Strict

FIRE SAFETY CODES in **COMMERCIAL & RESIDENTIAL**

application.

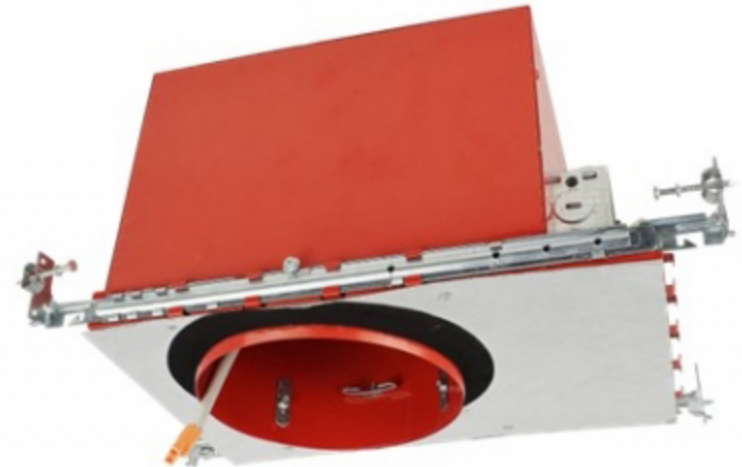

UL LISTED Double wall incorporated a NON-COMBUSTIBLE

FIBER INSULATION to prevent passage of FLAMES AND TOXIC GASES

And IGNITABLE GASES into the ceiling plenums, RATED for 2 hour

Protection.



Extra insulation provided between ceiling and FIRE BOX.

In addition, the NON-COMBUSTIBLE FIBER MATERIAL FIBER FILL, also

Acts as SOUND DAMPENING eliminating transfer of sounds between floors.

FEATURES:

- **UL Listed Certified (E499907)** 1HR to 2Hours **FIRE RATED.**
- ASTM-E283 Airtight RATED Enclosure.
- Applicable for IC and NON-IC RATED CEILING.
- LED Quick Connect Provide.
- Extend up to 24 1/2 BAR Hangers with Captive nails.
- Can Be used in standard application as sound dampening. Enclosure between floors.
- 8"X 12 frame profile Easy COMPACT Installation.
- 18W MAX WATTAGE FOR 6" RETROFIT DOWNLIGHT

