

Catalog Number

Project Name



WATTAGE
2 watts

LAMPS

2 Watts LED at 120V and 277V, LED lamps are operating in normal (AC input) and emergency (DC input) modes.
Ultra-bright, energy efficient, long-life red or green LADs with more than 10 years lifecycle.
LEDs have a minimum rated lamp life of 100,000 hours.

Features

Energy efficient LED compact and decorative design.
Removable directional indicator, letters.
6" height with 3/4" stroke and chevron directional arrows.
Single face with clear background
Double face with mirror background
90+ minutes emergency operation.
Available in white or black housing.

MOUNTING

Universal (wall, side or ceiling) mounting.
Universal knockouts on back plate allow for wall mounting directly to standard J-box
Canopy and mounting hardware provided.


ELECTRICAL

120/277V dual voltage operation standard.

BATTERY

3.6V long-life maintenance-free and rechargeable Ni-Cad battery on emergency (EM) units.
Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
Internal solid-state transfer switch automatically connects the internal battery to the LEDs for minimum 90 minutes emergency illumination.
LVD (low voltage disconnection) prevents battery from deep discharge.

DIMENSIONS

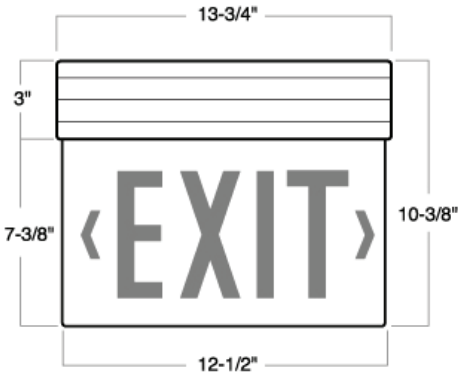

ORDERING

LS-EL-G

SERIES	FINISH
LS-EL	G - Green R - Red