


# 3CCT Retrofit Downlights

## Features

- 3CCT 3000K/4000K/5000K selectable.
- Completely ideal to replace incandescent.
- High CRI (90+), triac dimming. .
- 50000hrs lifetime rated.
- Energy Star listed, CEC Title 24 JA8 listed, UL listed, FCC compliant, RoHS compliant.
- Suitable for damp locations.



## Dimension

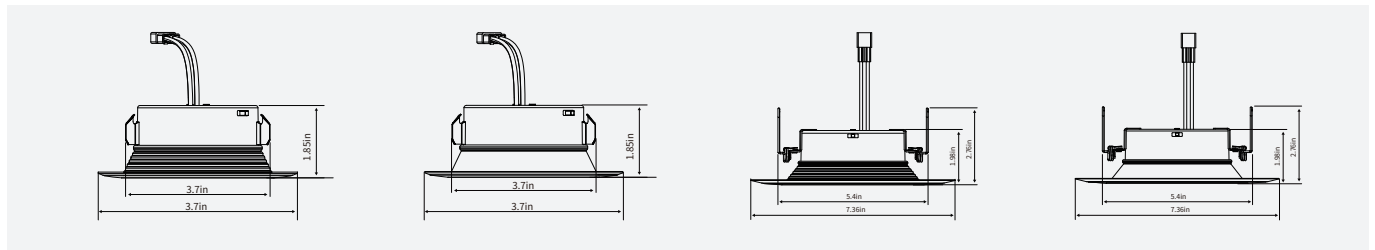

## Specification

Catalog Number	Size (inch) L W H	Input Voltage (V)	Lamp Watt (W)	Efficiency (LM/W)	Lumen Output (LM)	CCT (K)	CRI	Life Time (HRS)
LSF-4"3CCT/BF	4"	120VAC	8.7	80	700	3000/4000/5000	>90	50,000
LSF-4"3CCT/BF/BK	4"	120VAC	8.7	68	670	3000/4000/5000	>90	50,000
LSF-4"3CCT/SM	4"	120VAC	8.7	80	700	3000/4000/5000	>90	50,000
LSF-4"3CCT/SM/BK	4"	120VAC	8.7	68	670	3000/4000/5000	>90	50,000
LSF-5'6"/3CCT/BF	5/6"	120VAC	12.5	80	1000	3000/4000/5000	>90	50,000
LSF-5'6"/3CCT/SM	5/6"	120VAC	12.5	80	1000	3000/4000/5000	>90	50,000

\*\* BK = Matt Black Trim



LSF-4"3CCT/BF  
LSF-4" 3CCT/BF/BK



LSF-4"3CCT/SM  
LSF-4" 3CCT/SM/BK



LSF-5'6"/3CCT/BF



LSF-5'6"/3CCT/SM