


# LED Step Light High Voltage

## Features

- Frosted PC lens, Aluminum body, durable and corrosion resistant.
- Fits for standard junction boxes (not included).
- CRI >90.
- 3CCT 3000K/4000K/5000K selectable.
- Compatible with most Lutron and Leviton triac dimmers.
- Suitable for wet locations.
- For both indoor and outdoor use.
- Easy to install, 120V input voltage, no transformer required.
- Anti-glare friendly design.
- Wide beam angle.
- 50000hrs long life-time.



## Dimension

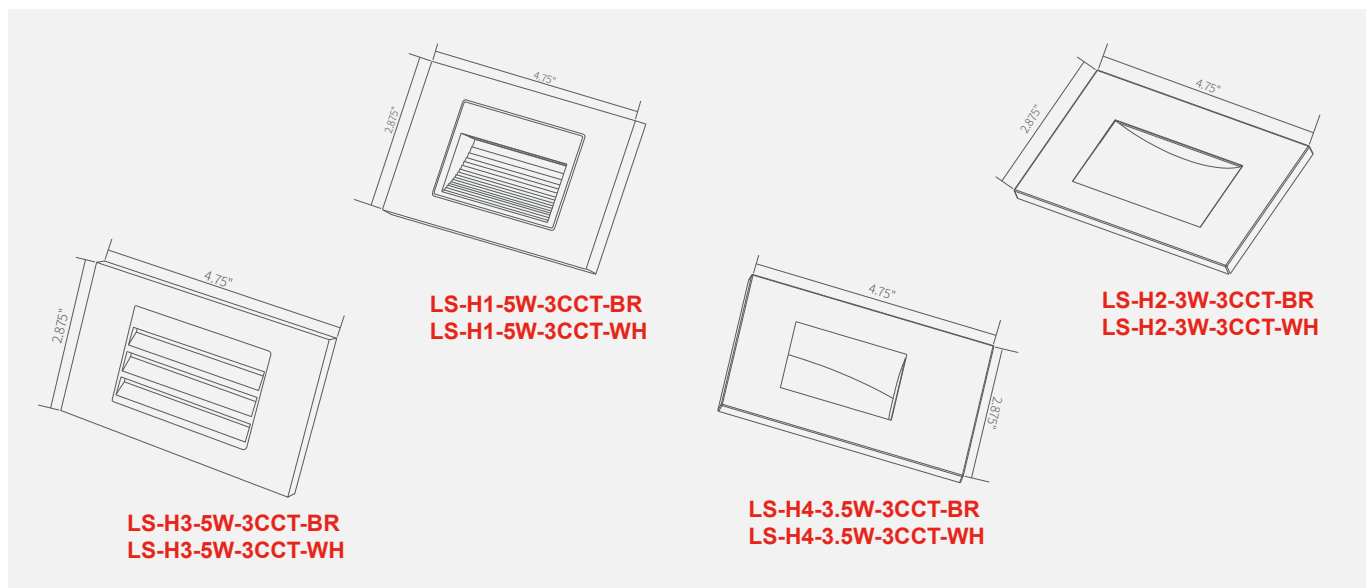

# LED Step Light High Voltage



## Specification

Catalog Number	Size (L*W*D)	Input Voltage (V)	Lamp Watt (W)	Efficacy (Lumen/watt)	Lumen Output (lm)	3CCT (K)	CRI	Life Time (Hrs)
LS-H1-5W-3CCT-BR	4.75"*2.875"*1.6"	120VAC	5	20	100	3000/4000/5000	>90	50,000
LS-H1-5W-3CCT-WH	4.75"*2.875"*1.6"	120VAC	5	50	250	3000/4000/5000	>90	50,000
LS-H2-3W-3CCT-BR	4.75"*2.875"*1.5"	120VAC	3	18	55	3000/4000/5000	>90	50,000
LS-H2-3W-3CCT-WH	4.75"*2.875"*1.5"	120VAC	3	33	100	3000/4000/5000	>90	50,000
LS-H3-5W-3CCT-BR	4.75"*2.875"*1.6"	120VAC	5	30	150	3000/4000/5000	>90	50,000
LS-H3-5W-3CCT-WH	4.75"*2.875"*1.6"	120VAC	5	42	210	3000/4000/5000	>90	50,000
LS-H4-3.5W-3CCT-BR	2.875"*4.75"*1.5"	120VAC	3.5	15	55	3000/4000/5000	>90	50,000
LS-H4-3.5W-3CCT-WH	2.875"*4.75"*1.5"	120VAC	3.5	42	150	3000/4000/5000	>90	50,000

