

LS-L-801W-SQ-5CCT


8 Inch 5CCT Square Flush Lens LED Retrofit

Features:

- Conduit quick-connect connectors facilitate installation.
- Protected LED driver performs at 120-277V.
- Available in 5 CCT 2700K, 3000K, 3500K, 4000K and 5000K.
- cULus classified.
- Energy star qualified.
- Wet locations (Not suitable for coastal/salt water area).
- Damp locations.
- RoHS compliances.
- Title 24 compliant.
- Tested in accordance with IESNA LM79 & LM80.



Dimension

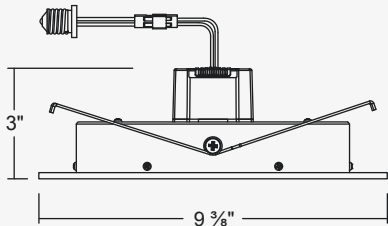

LSL-801W/SQ-5CCT

Specification

Catalog Number	Size	Input Voltage (V)	Lamp Watt (W)	Efficacy (Lumen/watt)	Lumen Output (lm)	CCT (K)	CRI	Life Time (Hrs)
LSL-801W/SQ-5CCT	8inch	120-277VAC	19	67-72	1590-1650	27/30/35/40/50	90	50000