


# 4FT 8FT LED Wraparound Fixture Round

## Features


- Heavy Gauge Steel Housing.
- Finish is high reflectance baked white enamel.
- Wiring knockouts are provided on back and end of housing.
- Opal PC lens, high flame retardant point.
- Class II/P driver, with 0-10V or Triac dimming.
- 50,000+ Hours LED Life Expectancy.
- Fast and easy to install.
- Ambient Temperature:-30 ~ 40 °C(-22°F to +104°F).
- Damp Location Rated.




## Dimension

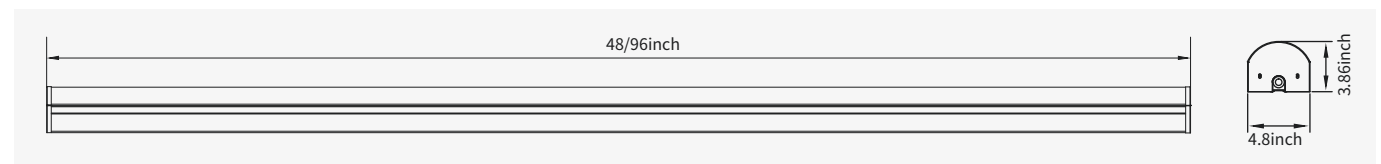

## Photometric

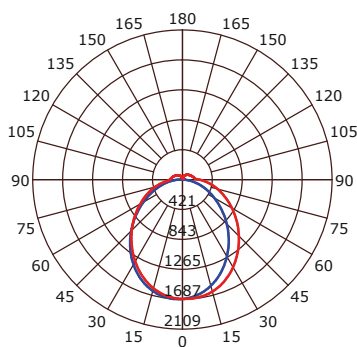

4FT

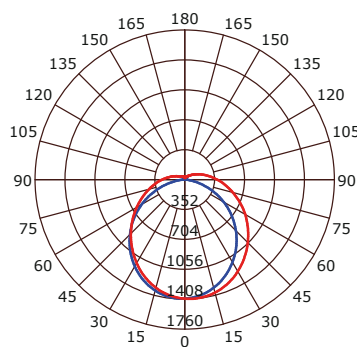

8FT



## Specification

Catalog Number	Size	Input Voltage (V)	Lamp Watt (W)	Efficacy (Lumen/watt)	Lumen Output (lm)	CCT (K)	CRI	Life Time (Hrs)
LS26-ST-4-3CCT	4FT	120-277VAC	40	115-120	4600-4800	3500/4000/5000	>80	50000
LS26-ST-4-MS-3CCT	4FT	120-277VAC	40	115-120	4600-4800	3500/4000/5000	>80	50000
LS26-ST-4-E-3CCT	4FT	120-277VAC	40	115-120	4600-4800	3500/4000/5000	>80	50000
LS26-ST-4-EMS-3CCT	4FT	120-277VAC	40	115-120	4600-4800	3500/4000/5000	>80	50000
LS26-ST-8-3CCT	8FT	120-277VAC	80	115-120	9200-9600	3500/4000/5000	>80	50000

\*\* E = Emergency Backup Kit; EMS = Emergency Backup Kit and Motion Sensor