


LED Under Cabinet Light

Features


- ETL, Suitable for damp locations.
- Multiple fixtures Linkable.
- 90 degree rotatable.
- 3 CCT selectable: 2700K/3000K/4000K.
- Working directly with line voltage 120V.
- Long lifetime, 5 years warranty.
- Two ways installation: Plug & Play Method & Hard Wire Method.

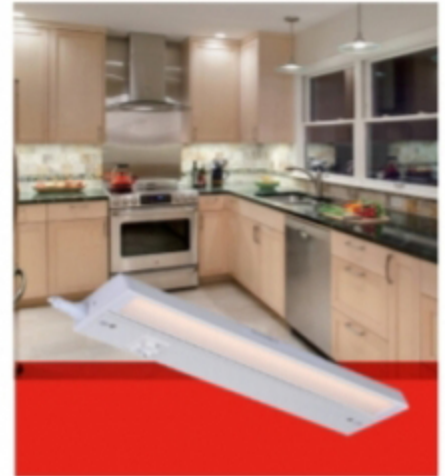

Dimension



Photometric

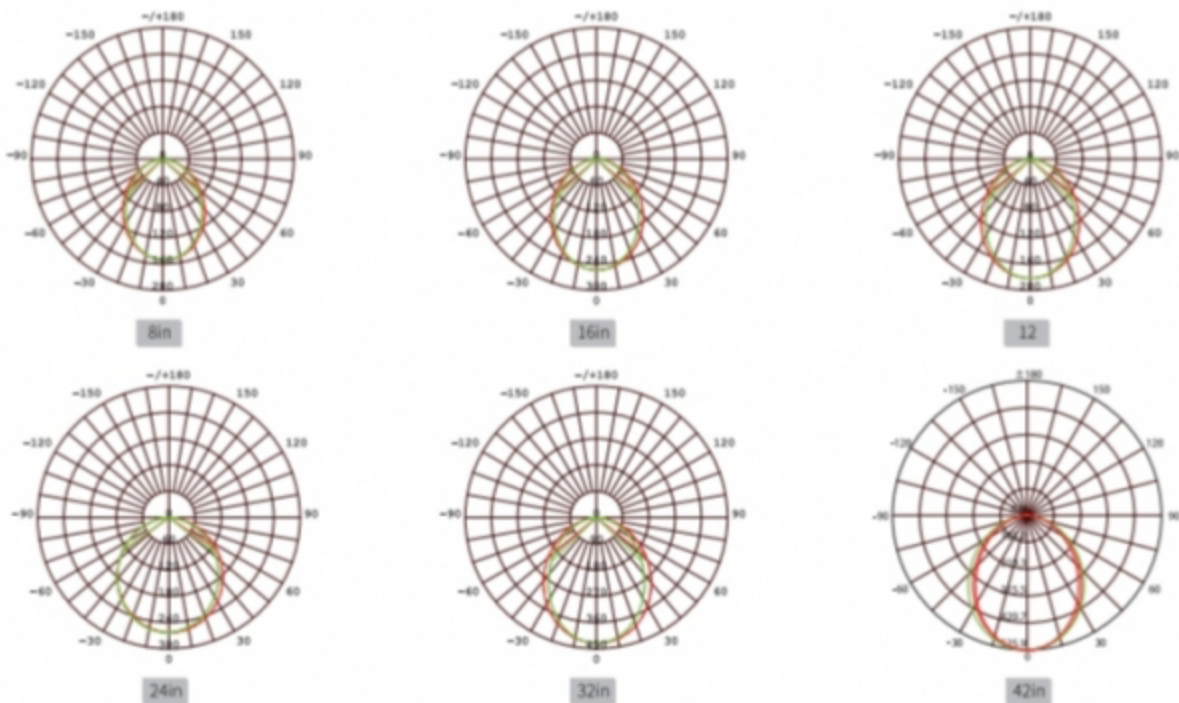

LED Under Cabinet Light

Specification

Catalog Number	Size (inch) L W H	Input Voltage (V)	Lamp Watt (W)	Efficacy (Lumen/watt)	Lumen Output (lm)	CCT (K)	CRI	Life Time (Hrs)
LS2-UC-8"3CCT	8 3 3/8 1	120-277VAC	6	50-60	320	2700/3000/4000	>90	50,000
LS2-UC-12"3CCT	12 3 3/8 1	120-277VAC	8	50-60	420	2700/3000/4000	>90	50,000
LS2-UC-16"3CCT	16 3 3/8 1	120-277VAC	10	50-60	600	2700/3000/4000	>90	50,000
LS2-UC-24"3CCT	24 3 3/8 1	120-277VAC	14	50-60	920	2700/3000/4000	>90	50,000
LS2-UC-32"3CCT	32 3 3/8 1	120-277VAC	18	50-60	1080	2700/3000/4000	>90	50,000
LS2-UC-42"3CCT	42 3 3/8 1	120-277VAC	22	50-60	1300	2700/3000/4000	>90	50,000



90 Degree Rotatable

Accessories



Connector

Catalog Number: LS2-UC-C"4



12in extension cable

Catalog Number: LS2-UC-C"2



End to end connector

Catalog Number: LS2-UC-C"3