

LED High Bay

Features


- UL, wet locations rated, DLC approved.
- Sealed die-casting profile for indoor and outdoor applications.
- Best choice for replacing 250W MH and 400W MH.
- Universal voltage 120-277V.
- Increase energy savings with bi-level motion sensor.
- 5 years warranty.
- Operating temperature is -40°C to 50°C (-40°F to 122°F).
- Hook mount, pendant mount and surface mount available.




Applications

- Great for replacing existing HID, T5 or T8 high bay or low bay lighting Perfect for hard-to-reach places
- Indoor/Outdoor lighting
- Great for gymnasiums, factories, warehouse, workshops, stadiums/arenas, big box retail, supermarkets, exhibition center and other commercial applications

Dimension

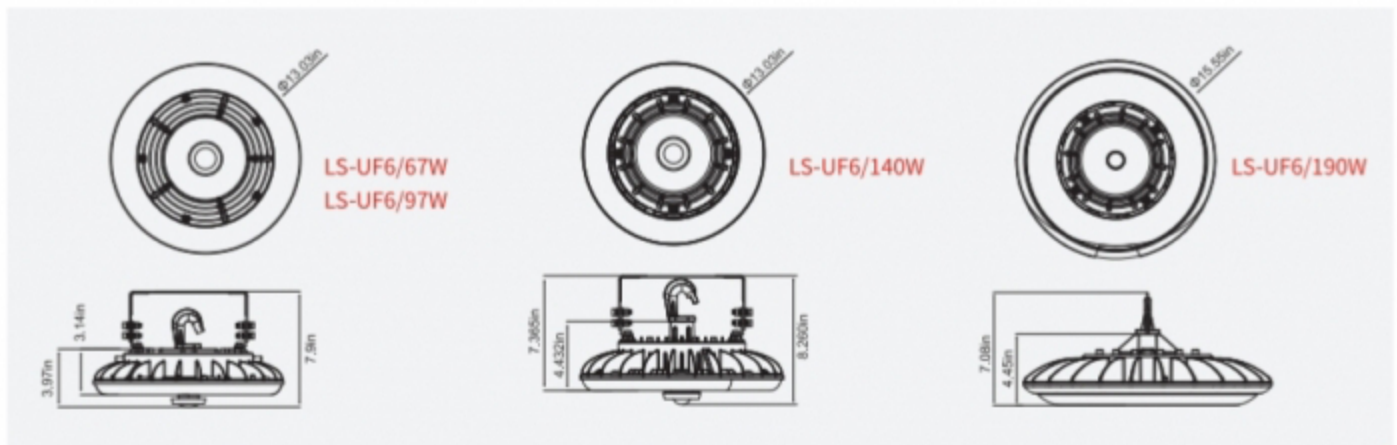

Photometric

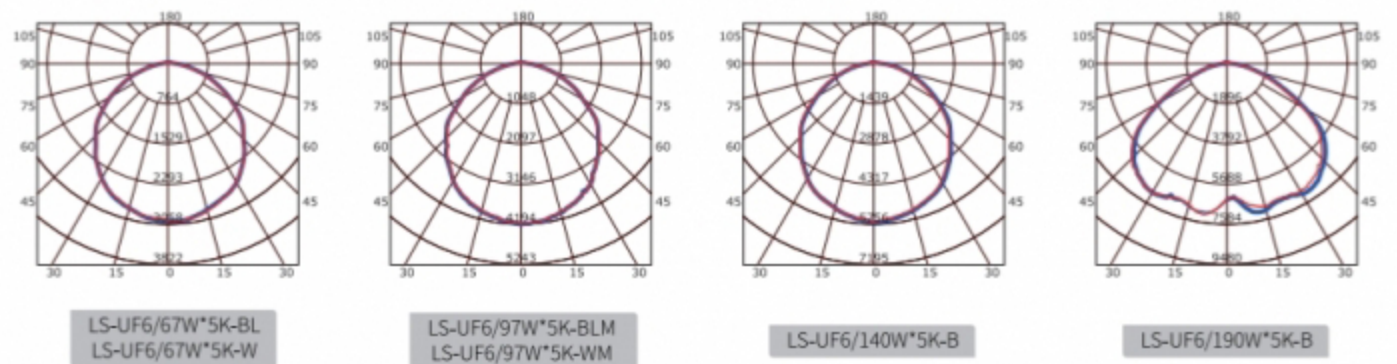

LED High Bay

Specification

Catalog Number	Size (inch)	Input Voltage (V)	Lamp Watt (W)	Efficacy (Lumen/watt)	Lumen Output (lm)	CCT (K)	CRI	Life Time (Hrs)
LS-UF6/67W*5K-BL	13.03X5.85IN	120-277VAC	67	136	9100	5000	>80	50,000
LS-UF6/67W*5K-W	13.03X5.85IN	120-277VAC	67	136	9100	5000	>80	50,000
LS-UF6/97W*5K-BLM	13.03X5.85IN	120-277VAC	97	127	12300	5000	>80	50,000
LS-UF6/97W*5K-WM	13.03X5.85IN	120-277VAC	97	127	12300	5000	>80	50,000
LS-UF6/140W*5K-BM	13.03X7.365IN	120-277VAC	140	125	17500	5000	>80	50,000
LS-UF6/190W*5K/BM	15.55X7.08IN	120-277VAC	190	126	24000	5000	>80	50,000

**For Emergency and Sensor, please refer to Accessories.



LS-UF6/67W*5K-BL
LS-UF6/97W*5K-BLM



LS-UF6/140W*5K-BM



LS-UF6/190W*5K/BM



LS-UF6/67W*5K-W
LS-UF6/97W*5K-WM

ACCESSORIES



1

LS-HBI*PIR

-Motion Sensor
-Integrated motion sensor available for on/off and dimming control for maximum energy savings.



2

LS-RC100


-Remote control for dimming sensor
-Power:2*AAA 1.5V batteries



3

LS-EMB8W/90-2 For 67W/140W
LS-EMB8W/90-3 For 97W/190W

-Emergency Box
-Emergency battery pack would provide the necessary brightness in emergency situations.
-Applicable ambient temperature is 10°C(50°F) to 40°C(104°F).



4

LS-UBL*6

-U-bracket
-Use for surface mounting application.
-Available to adjust the angle of MHB06 to control the direction of irradiation.