

# LS26-DEX

IP65 Outdoor emergency exit light

Catalog Number

Project Name



WATTAGE
6 watts

### FEATURES

Decorative, low-profile, architectural design

### MOUNTING

Surface mount via easy connect back plate that fits most standard size junction boxes

### ELECTRICAL

Dual 120V/277V

Can be used in AC mode and EMG mode

Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing


### BATTERY

4.8V long-life, maintenance-free, rechargeable NiCd battery

Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.

Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

## DIMENSIONS

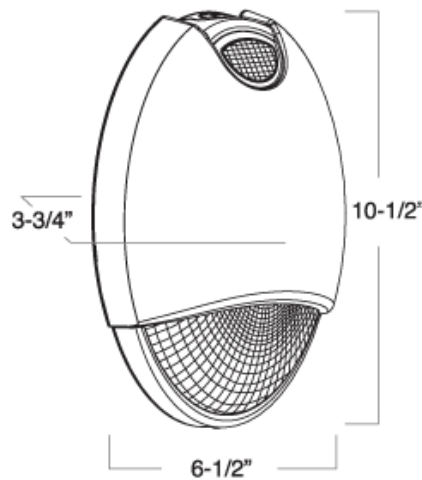

## ORDERING

### LS26-DEX-BZ

SERIES	FINISH
LS26-DEX	BRONZE