


LED Disk Light With PIR Sensor

Features

- Automatically turning on when motion is detected
- Durable aluminum housing allows excellent heat dissipation
- Corrosion and heat resistance powder coated finished or satin nickel finished
- Smooth polycarbonate cover dilvers charming illumination
- 120VAC/60Hz line voltage input, no driver needed
- Available in 2700-5000K color temperature, single CCT and multiple CCT
- Precise optics for maximum efficiency, up to 70lm/W
- cETLus, ES listed for damp locations
- 3-year limited warranty



Dimension

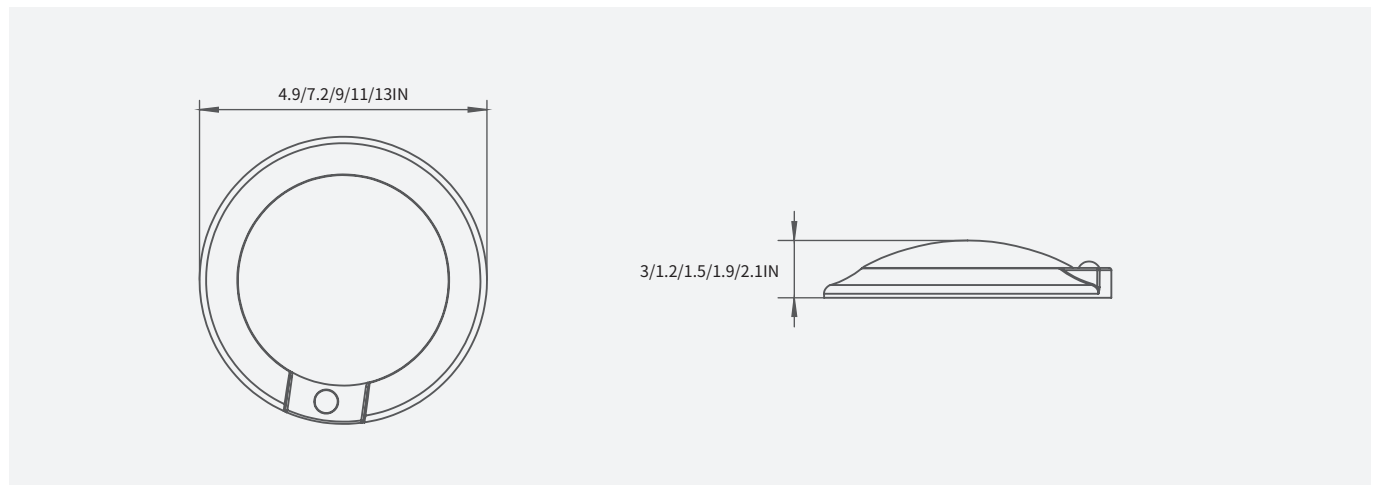

Specification

Catalog Number	Size	Input Voltage (V)	Lamp Watt (W)	Efficacy (Lumen/watt)	Lumen Output (lm)	CCT (K)	CRI	Life Time (Hrs)
LS26-DL4-9W-MS-3CCT	4.9*1.3	120VAC	9	70	630	3000/4000/5000	>90	35000
LS26-DL6-15W-MS-3CCT	7.2*1.2	120VAC	15	70	1050	3000/4000/5000	>90	35000
LS26-DL8-20W-MS-3CCT	9*1.5	120VAC	20	70	1400	3000/4000/5000	>90	35000
LS26-DL10-25W-MS-3CCT	11*1.9	120VAC	25	70	1750	3000/4000/5000	>90	35000
LS26-DL12-30W-MS-3CCT	13*2.1	120VAC	30	70	2100	3000/4000/5000	>90	35000




LED Driver

Features

- 24V DC constant voltage hardwire driver
- Phase dimming compatible with MLV, ELV, TRIAC dimmers
- Short circuit, over-voltage, over-temperature, and overload protections
- Forward phase and reverse phase compatible
- Slim, compact aluminum housing
- cULus Listed damp location rated
- Class 2, Class P, Type HL
- FCC Compliant



Dimension

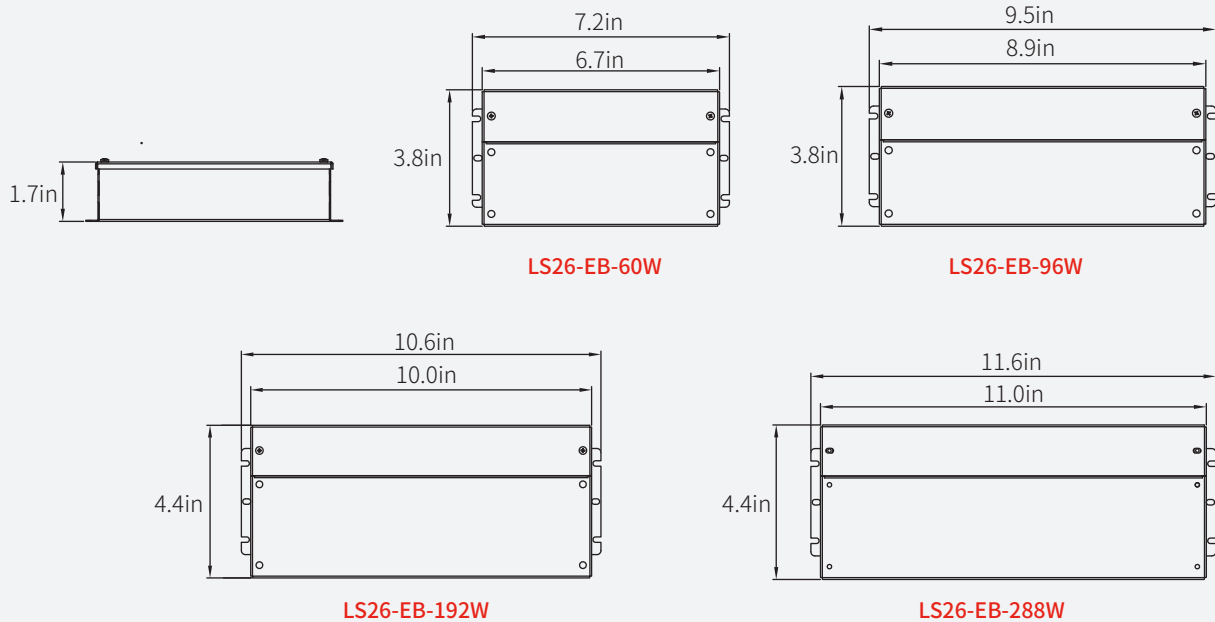

Specification

Catalog Number	Size	Input Voltage (V)	Watt	Output Circuit Qty (load)	Min Load (W)	Max Load (W)	Output Voltage (V)	Output Current (A)	Input Current (A)	PF
LS26-EB-60W	7.2*3.8*1.7	120-277VAC	60	1	6.0	60	24VDC	2.5	0.7	≥0.9
LS26-EB-96W	9.5*3.8*1.7	120-277VAC	96	1	9.6	96	24VDC	4	1.2	≥0.9
LS26-EB-192W	10.6*4.4*1.7	120-277VAC	2*96	2	19.2	192	2*24VDC	2*4	2.4	≥0.9
LS26-EB-288W	11.6*4.4*1.7	120-277VAC	3*96	3	28.8	288	3*24VDC	3*4	3.6	≥0.9