

LED Backlit Panel Light

Features

ETL: Suitable for damp locations. (Type IC rated)

DLC: Meet latest DLC 5.1 requirement.

Dimming: Isolate 0-10V dimming driver, 120-277V.


Long Lifespan: 50,000 hours, 5 years warranty.

Lens: High-transmission, diffuse lens have excellent distribution and uniformity.


Applications: Ultra slim backlit design for more applications.

3CCT selectable: 3500K/4000K/5000K.


3wattage selectable: 25W-30W-40W, 30W-40W-50W

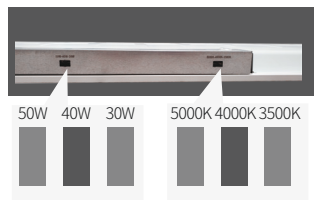


Dimension

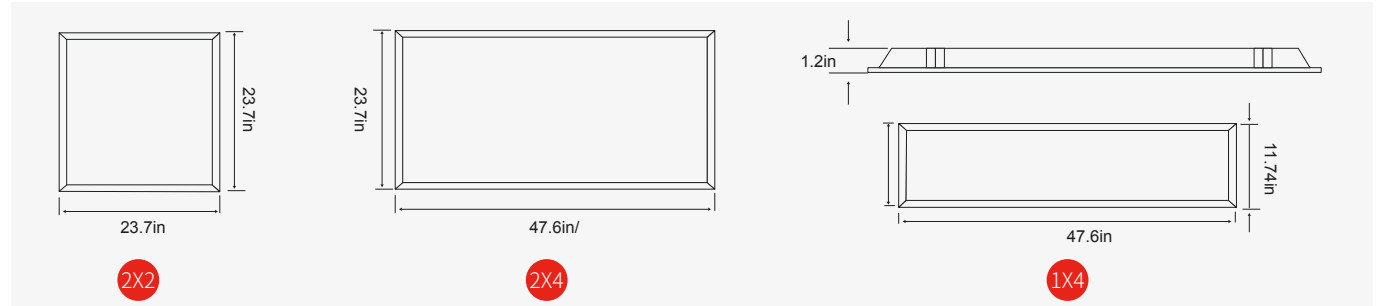


Photometric

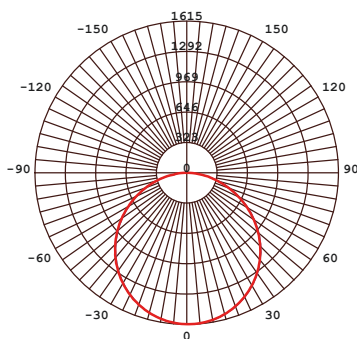

2x2

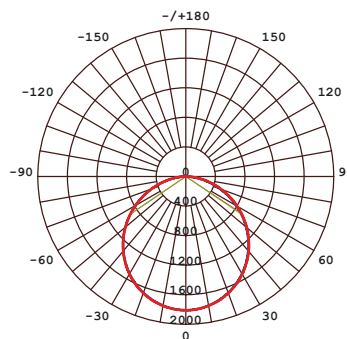

2x4

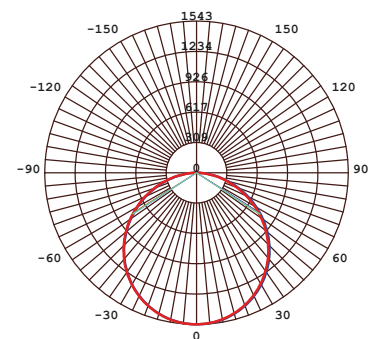

1x4

LED Backlit Panel Light

Specification


Catalog Number	Size	Input Voltage (V)	Lamp Watt (W)	Efficacy (Lumen/watt)	Lumen Output (lm)	CCT (K)	CRI	Life Time (Hrs)
LS26-KLFP2×2CCT/WT	2X2	120-277VAC	25-30-40	110	2750/3300/4400	3500-4000-5000	>80	50,000
LS26-KLFP1×4CCT/WT	1X4	120-277VAC	25-30-40	110	2750/3300/4400	3500-4000-5000	>80	50,000
LS26-KLFP2×4CCT/WT	2X4	120-277VAC	30-40-50	110	3300/4400/5500	3500-4000-5000	>80	50,000



2X2




2X4




1X4

Installation


Recession

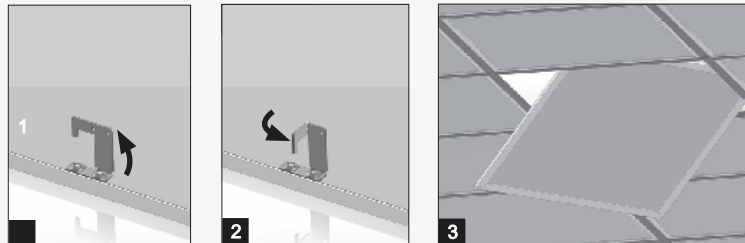

Surfaced Mounted Frame

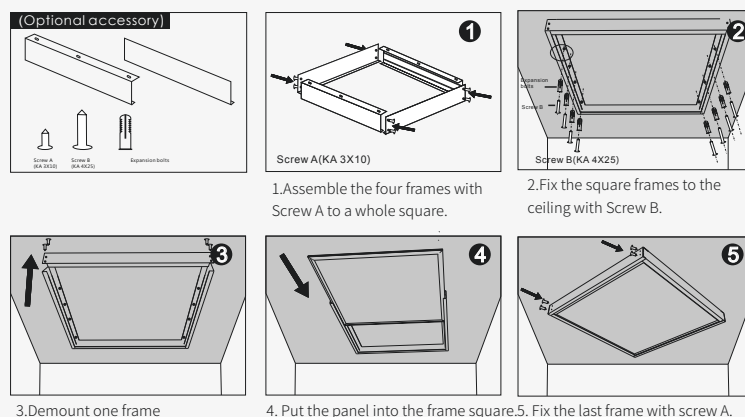

Suspension

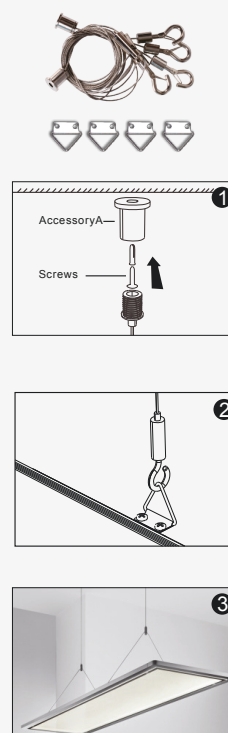

Recessed Frame

